



KATALOG PROIZVODA

DRACO

We are waterproof

O NAMA

ABOUT US

DRACO je tvrtka specijalizirana za projektiranje, proizvodnju, prodaju i inženjering u području izolacija i sanacija u graditeljstvu. Kvaliteta poslovanja potvrđena je stotinama zadovoljnih klijenata i milijunima izoliranih m².

Svojim klijentima pružamo tehničku podršku za sve naše proizvode i tehnologije prema principima:

- Cjelovita rješenja izolacija u vašim projektima – projektiramo odgovarajuće izolacijske sustave za svaki projektni zadatak.
- Brza rješenja za probleme na vašem gradilištu – ispravno i temeljito analiziramo stanje te na temelju analize predlažemo najkvalitetnije rješenje.

Dinamičnost prodajne mreže je potpomognuta kvalificiranim tehničkim savjetovanjem te fokusiranjem na rješavanje problema i pronalaženje optimalnih rješenja za klijenta. Predani smo prilagođavanju Vašim potrebama i donošenju brzih odluka prema promijenjenim okolnostima.

Naglasak stavljamo na kvalitetna tehnološka rješenja koja su jednostavna i brza za ugradnju, dugotrajna i ukupno gledano jeftinija od tradicionalnih izolacija.

Stalno težimo pružanju najbolje moguće usluge:

- stručna tehnička podrška na gradilištu i u uredu
- pravodobna isporuka materijala
- konkurentne cijene.

DRACO is a company which specialises in the design, production, sales and engineering of insulation and construction repairs. Hundreds of satisfied clients and millions of insulated m² are a testament to the quality of our work.

We provide our clients with technical support for all our products and technologies according to the principles:

- *Complete insulation solutions in your projects – we design adequate insulation systems for every project assignment;*
- *Fast solutions for problems at your construction site – we analyse the status correctly and thoroughly and propose the best solution based on this analysis.*

The dynamics of the sales network is supported by professional technical consultation and a focus on problem solving and finding the optimal solutions for the client. We are dedicated to adapting to your needs and making quick decisions when faced with changing circumstances.

We emphasise high-quality technological solutions that feature simple and quick installation, longevity and, as a whole, more affordability than traditional insulation products.


We constantly strive to provide the best service possible:

- *Professional technical support on site and in the office;*
- *Timely delivery of materials;*
- *Competitive prices.*



Vodič za cjelovitu hidroizolaciju Vaše kuće

Complete guide for waterproofing of Your house

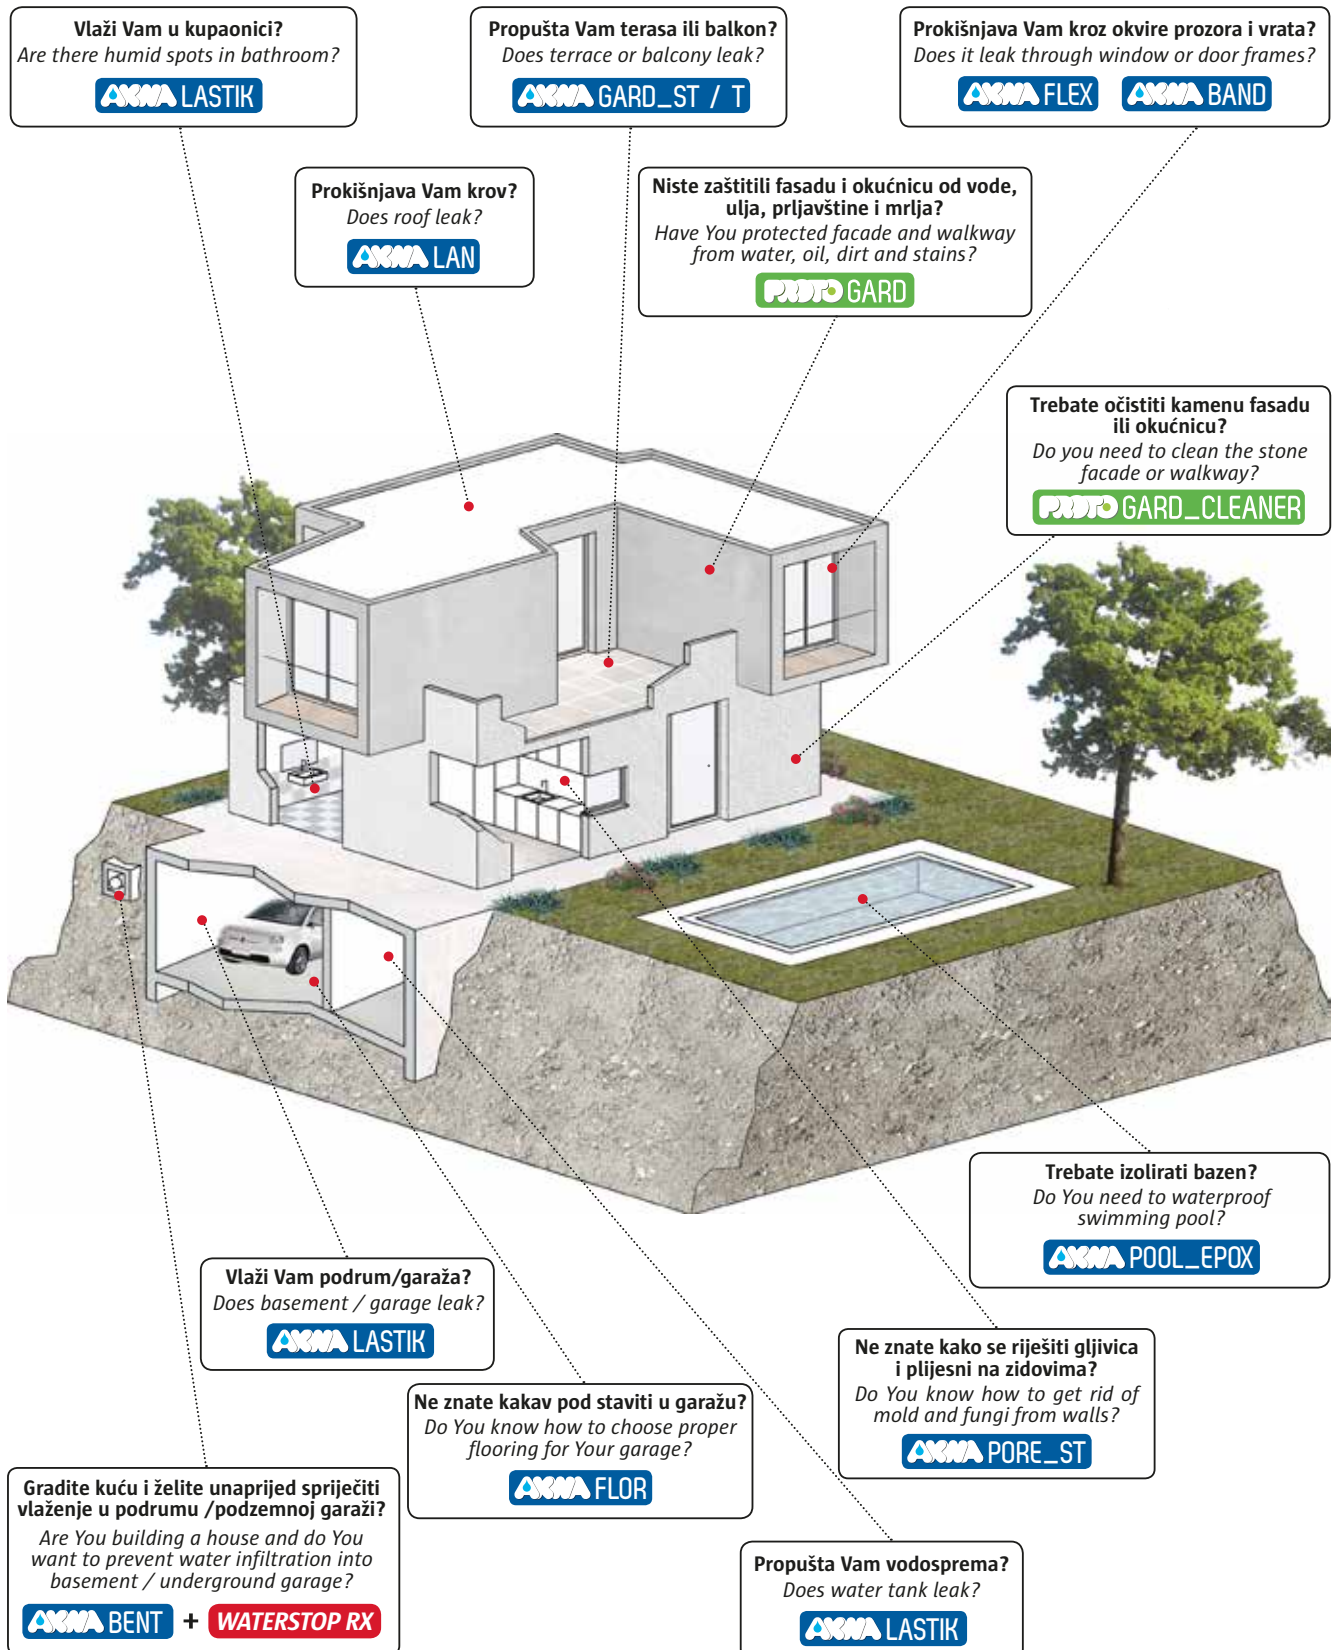

Sadržaj / *Content*

01

Bentonitne hidroizolacije
Bentonite waterproofing products

02

Polimer cementne hidroizolacije
Polymer modified cement waterproofing

03

Poliuretanske hidroizolacije
Polyurethane waterproofing

04

Jednoslojne krovne membrane
Single-layer roofing membranes

05

Geotekstili
Geotextiles

06

Parne brane
Vapour barriers

07

Hidroizolacijski i dekorativni premazi
Waterproofing and decorative coatings

08

Antikondenzacijski premazi
Anti-condensation coatings

09

Industrijski i dekorativni podovi
Industrial and decorative floors

10

Impregnacije
Impregnations

11

Prajmeri
Primers

12

Proizvodi za sanacije
Products for repairs

13

Super lagani termobetoni
Light thermal concrete

14

Proizvodi za brtvljenje
Sealing products

01

Bentonitne
hidroizolacije

*Bentonite
waterproofing
products*

AKWABENT

Jednoslojna bentonitna membrana
Single-layer bentonite membrane

Primjena / Application

Hidroizolacija i zaštita podzemnih dijelova
konstrukcija izloženih djelovanju vode

.....
*Waterproofing and the protection of underground
sections of the structure which are exposed to water*

Prednosti / Advantages

- Brza i jednostavna ugradnja
- Djelotvoran u uvjetima hidrostatskog tlaka do visine vodnog stupca od 70 m
- Zaštitni beton nije potreban, armatura se polaže direktno na AKWABENT
- Mogućnost ugradnje tijekom čitave godine
- Jednostavna obrada kritičnih detalja
- Traje koliko i sama konstrukcija
- Neškodljiv za okoliš
-
Quick and simple installation
- *Effective in hydrostatic pressure environments of up to 70 m water column height*
- *Protective concrete is not necessary, reinforcement is laid directly on AKWABENT*
- *Can be installed during the entire year*
- *Simple processing for critical details*
- *Will last the lifetime of your structure*
- *Not harmful for the environment*

Pakiranje / Packaging

Role od 1,1m x 5m; 2,5m x 10m; 5m x 40m

.....
1.1 m x 5 m; 2.5 m x 10 m; 5 m x 40 m rolls



AKWABENT

Jednoslojna bentonitna membrana
Single-layer bentonite membrane



AKWAFIX / AKWAFIX 5

Rondele i čavli za pričvršćivanje bentonitnih hidroizolacija
Rondels and nails for fixing bentonite waterproofing materials

AKWAFIX

Polietilenske rondela i čavli za pričvršćivanje bentonitnih hidroizolacija

Polyethylene rondels and nails for fixing bentonite waterproofing materials

Pakiranje / Packaging

Komplet od 500 kom polietilenskih rondela i 500 kom čavala

Set of 500 polyethylene rondels and 500 nails



AKWAFIX 5

Polietilenske rondela za pričvršćivanje bentonitnih hidroizolacija

Polyethylene rondels for fixing bentonite waterproofing materials

Pakiranje / Packaging

500 kom polietilenskih rondela

500 polyethylene rondels



AKWABENT LT

Jednoslojna bentonitna membrana za manje zahtjevne uvjete
Single-layer bentonite membrane for less demanding environments

Primjena / Application

Hidroizolacija i zaštita podzemnih dijelova konstrukcija izloženih djelovanju vode

Waterproofing and the protection of underground sections of the structure which are exposed to water

Prednosti / Advantages

- Brza i jednostavna ugradnja
 - Minimalna priprema podloge
 - Zaštitni beton nije potreban, betoniranje konstruktivnih elemenata se izvodi direktno na AKWABENT LT
 - Robusnost sustava osigurava direktno polaganje armature na AKWABENT LT
 - Mogućnost ugradnje tijekom čitave godine
 - Jednostavna obrada kritičnih detalja
 - Neškodljiv za okoliš
-
- *Quick and simple installation*
 - *Minimal preparation for the surface*
 - *Protective concrete is not necessary, the laying of construction elements is performed directly on AKWABENT LT*
 - *Direct laying of the reinforcement on Sealtex is ensured thanks to the robustness of the system*
 - *Can be installed during the entire year*
 - *Simple processing for critical details*
 - *Not harmful for the environment*

Pakiranje / Packaging

Role od 1,1m x 5m; 2,5m x 10m; 5m x 40m

.....
1.1 m x 5 m; 2.5 m x 10 m; 5 m x 40 m rolls



WATERSTOP RX 101

Hidroekspanzivna samobrtveća traka na bazi bentonit-butila
Hydro-expansive self-sealing bentonite-butyl strip

Primjena / Application

Brtvljenje radnih prekida i prodora u podzemnim armiranobetonskim konstrukcijama

Sealing of waterstops and penetrations in below-ground reinforced concrete structures

Prednosti / Advantages

- Samoinjektirajuća
- Brza i jednostavna ugradnja
- Jednostavna obrada kritičnih detalja.
- Traje koliko i sama konstrukcija
- Neškodljiva za okoliš
- *Self-injecting*
- *Quick and simple installation*
- *Simple processing for critical details*
- *Will last the lifetime of your structure*
- *Not harmful for the environment*

Pakiranje / Packaging

Kutija sa 6 rola od 25mm x 19mm x 5m, zaštitnom REVOFIX mrežicom i čavlicima za beton

Box of 6 25 mm x 19 mm x 5 m rolls with protective REVOFIX net and nails for concrete



BENTONITNA PASTA

Gusta bentonitna pasta za obradu detalja u sustavu bentonitnih hidroizolacija
Viscous bentonite paste for processing details in the bentonite waterproofing system

Primjena / Application

Brtvljenje prodora kroz AKWABENT i obrada završetaka AKWABENT-a.

.....
Sealing penetrations with the use of AKWABENT and detail processing for AKWABENT.

Prednosti / Advantages

- Ugrađuje se sa zidarskom lopaticom jednostavno i brzo
- Hidratacija mu omogućava bubrenje i samobrtvljenje čime obrađenim detaljima osigurava vodotijesnost
- Trajno zadržava pastoznost
-
Can be installed simply and quickly with masonry trowel
- *Hydration allows for swelling and self-sealing which ensures the waterproofing of processed details*
- *Retains paste form long-term*

Pakiranje / Packaging

Kanta od 25 lit

.....
25 litre bucket



BENTONITNE GRANULE

Čisti granulirani bentonit za obradu detalja u sustavu bentonitnih hidroizolacija
Pure granulated bentonite for detail processing in the bentonite waterproofing system

Primjena / Application

Brtvljenje prodora kroz AKWABENT i dodatna količina bentonita na zahtjevnim pozicijama.

Sealing penetrations through AKWABENT and additional amounts of bentonite for demanding positions.

Prednosti / Advantages

- Nasipaju se u rasutom stanju ili apliciraju kao bentonitni mort uz dodatak vode
- Hidratacija im omogućava bubrenje i samobrtvljenje čime obrađenim detaljima osiguravaju vodotijesnost
- *They are distributed in scattered form or applied as bentonite mortar with the addition of water*
- *Hydration enables swelling and self-sealing which ensures the waterproofing of processed details*

Pakiranje / Packaging

Vreća od 25 kg

25 kg sack



02

Polimer-cementne
hidroizolacije

*Polymer
modified cement
waterproofing*

AKWALASTIK 5.0

Visoko fleksibilni polimer-cementni hidroizolacijski premaz
High-flexibility polymer modified cement waterproofing coating

Primjena / Application

- Hidroizolacija podzemnih dijelova objekata iznutra (podrumi, bazeni, septičke jame...) u uvjetima pozitivnog ili negativnog tlaka
- Hidroizolacija terasa i balkona sa završnim slojem keramike
- Hidroizolacija mokrih čvorova (kupaonice, praonice, wellnessi...)
- Hidroizolacija betonskih konstrukcija
- Hidroizolacija spremnika pitke vode (cisterni i gustirni)
- *Waterproofing of underground sections of structures on the inside (basements, pools, septic tanks...) in positive or negative pressure conditions*
- *Waterproofing of terraces and balconies with a ceramic layer finish*
- *Waterproofing of sanitary blocks (bathrooms, utility rooms, wellness areas...)*
- *Waterproofing of concrete structures*
- *Waterproofing of drinking water containers (cisterns and wells)*

Prednosti / Advantages

- Praktična i brza aplikacija
- Otporan na pozitivan i negativan tlak
- Optimalna prionjivost na različite vrste podloga (beton, matunele, ciglu, gips, karton gips, plastiku, metal, keramiku, polistiren, itd.)
- Keramičke pločice se lijepe izravno na Akwalastik 5.0 u fleksibilnom ljeplju
- Odlična fleksibilnost - premoštava pukotine na podlozi do 2 mm
- *Practical and quick application*
- *Resistant to positive and negative pressure*
- *Optimal adhesiveness to various types of surfaces (concrete, massive floor tiles, brick, gypsum, gypsum carton, plastics, metal, ceramics, polystyrene, etc.)*
- *Ceramic tiles are fixed directly on AKWALASTIK 5.0 using a flexible adhesive*
- *Excellent flexibility - bridges gaps in the base of up to 2 mm in size*



Potrošnja / Consumption

3,5 - 4,0 kg/m² za obje ruke bez ojačanja; 4,5 - 5,0 kg/m² s ugrađenim ojačanjem (za zahtjevne uvjete)
.....
3.5 - 4.0 kg/m² for both layers, without reinforcement; 4.5 - 5.0 kg/m² with built-in reinforcement (for more demanding conditions)

Pakiranje / Packaging

Komplet od 20 kg (15 kg praška i 5 kg tekućine)
.....
20 kg set (15 kg powder and 5 kg liquid)

AKWALASTIK 5.0

Visoko fleksibilni polimer-cementni hidroizolacijski premaz
High-flexibility polymer modified cement waterproofing coating



AKWALASTIK 1.0

Fleksibilni polimer-cementni hidroizolacijski premaz
Flexible polymer modified cement waterproofing coating

Primjena / Application

- Hidroizolacija kupaonica i wc-a
- Hidroizolacija balkona i terasa sa završnim slojem keramike
- Hidroizolacija betonskih konstrukcija u tlu
- Prekid kapilarne vlage u temeljima
-
- *Waterproofing of bathrooms and toilets*
- *Waterproofing of terraces and balconies*
- *Waterproofing of concrete structures below ground*
- *Cutting rising damp in foundations*

Prednosti / Advantages

- Jednokomponentan (miješa se s vodom)
- Keramičke pločice se lijepe izravno na Akwalastik 1.0 u fleksibilnom ljepilu
- Optimalna prionjivost na različite vrste podloga (beton, matunele, ciglu, gips, karton gips, plastiku, metal, keramiku, polistiren, itd.)
- Praktična i brza aplikacija
-
- *Single component product mixed with water*
- *Ceramic tiles can be glued directly to AKWALASTIK 1.0 using flexible adhesive*
- *Adheres to different types of surfaces (concrete, massive floor tiles, brick, gypsum board, plastics, metal, ceramic, polystyrene, etc.)*
- *Fast and practical application*

Potrošnja / Consumption

1,5 kg/m² za 1 mm debljine. Preporučuje se ugradnja u dva sloja minimalne ukupne debljine 2 mm.

.....
1,5 kg/m² for 1 mm thickness. It is recommended to install two coats of minimum total thickness of 2 mm.

Pakiranje / Packaging

Vreća od 20 kg
.....
20 kg sack



AKWALASTIK 1.0

Fleksibilni polimer-cementni hidroizolacijski premaz
Flexible polymer modified cement waterproofing coating



AKWALASTIK PRIMO

Jednokomponentni prajmer u sistemu polimercementnih hidroizolacijskih premaza
Single-component primer in the system of polymer cement waterproofing coatings

Primjena / Application

Priprema cementnih podloga (npr. beton, cementni mortovi, estrih-betoni, itd.) prije apliciranja polimercementnih hidroizolacijskih premaza.

Preparation of cement base surfaces (for instance: concrete, cement mortars, screed-concrete, etc.) prior to applying polymer cement waterproofing coatings.

Prednosti / Advantages

- Regulira apsorpciju podloge
- Konsolidira podlogu bez stvarnja površinskog filma
- Smanjuje paropropusnost
- Eliminira poroznost na cementnim podlogama
- Poboljšava prijanjanje hidroizolacijskog premaza
- Nema otapala i može se aplicirati u zatvorenim i slabo ventiliranim prostorima
- *Regulates base surface absorption*
- *Consolidates the surface without creating a surface film*
- *Reduces vapour permeability*
- *Eliminates porosity on cement base surfaces*
- *Improves adhesiveness of waterproofing coating*
- *No solvents and can be applied in closed areas and areas with weak ventilation*

Potrošnja / Consumption

Ovisno o poroznosti podloge je cca. 200 – 300 g/m²

Depending on the porosity of the base surface, approx. 200 – 300 g/m²

Pakiranje / Packaging

Kanta od 5 l

5 l bucket



03

Poliuretanske
hidroizolacije

*Polyurethane
waterproofing*

AKWAGARD ST

Jednokomponentna poliuretanska tekuća membrana (tekuća guma)
Single-component polyurethane liquid membrane (liquid rubber)

Primjena / Application

Hidroizolacija i zaštita:

- Ravnih krovova
- Mostova
- Kanala za navodnjavanje
- Laganih krovova od metala ili fibrocementa
- Verandi i balkona
- Gipsanih i cementnih ploča
- Epdm membrana
- Poliuretanskih ploča za toplinsku izolaciju
- Parkirališta
- Tribina na stadionima

.....
Waterproofing and protection for:

- *Level roofs*
- *Bridges*
- *Irrigation canals*
- *Light metal or fibre cement roofs*
- *Verandas and balconies*
- *Gypsum and cement plates*
- *EPDM membranes*
- *Polyurethane thermal insulation*
- *Parking lots*
- *Stadium stands*

Boje / Colours

Bijela i siva

.....
White and grey

Potrošnja / Consumption

Minimalna ukupna potrošnja u dva sloja je 1,50 kg/m²

.....
The minimum total consumption for two layers is 1.50 kg/m²

Pakiranje / Packaging

Kante od 1kg, 6kg i 25kg

.....
Buckets of 1kg, 6kg and 25kg



Prednosti / Advantages

- Izvrsna prionjivost na gotovo svaku podlogu
 - Izvrsna otpornost na vremenske uvjete i uv zrake
 - Bijela boja reflektira većinu sunčeve energije i tako znatno smanjuje unutrašnju temperaturu u prostorijama objekta
 - Otpornost na ekstremne temperature od -40°C do 200°C (šok)
 - Visoka elastičnost, čvrstoća na vlak i kidanje te otpornost na abraziju
-
- *Excellent adhesiveness to nearly any surface*
 - *Excellent resistance to weather and UV radiation*
 - *The white colour reflects most sunlight, significantly reducing the internal temperature of the structure*
 - *Resistant to extreme temperatures from -40°C to 200°C (shock)*
 - *High elasticity, tensile and breaking strength, and abrasion resistance*

AKWAGARD ST

Jednokomponentna poliuretanska tekuća membrana (tekuća guma)
Single-component polyurethane liquid membrane (liquid rubber)



AKWAGARD RAPID

Poliuretanska tekuća membrana brzog umrežavanja (tekuća guma)
Polyurethane liquid fast curing membrane (liquid rubber)

Primjena / Application

Hidroizolacija i zaštita:

- Ravnih krovova
- Mostova
- Kanala za navodnjavanje
- Laganih krovova od metala ili fibrocementa
- Verandi i balkona
- Gipsanih i cementnih ploča
- EPDM membrana
- Poliuretanskih ploča za toplinsku izolaciju
- Parkirališta
- Tribina na stadionima

Waterproofing and protection of:

- Flat roofs
- Bridges
- Irrigation canals
- Light roofs of metal or fibre cement
- Verandas and balconies
- Gypsum and cement boards
- EPDM membranes
- Polyurethane insulation
- Parking decks
- Stadium stands

Prednosti / Advantages

- Proizvod brzo umrežava
 - Može se nanositi u jednom debljem sloju
 - Izvrsna prionjivost na gotovo svaku podlogu
 - Izvrsna otpornost na vremenske uvjete i UV zračenje
 - Bijela boja reflektira većinu sunčeve energije i tako znatno smanjuje unutrašnju temperaturu u prostorijama objekta
 - Otpornost na ekstremne temperature od -40°C do 80°C, podnosi temperaturni šok do 200°C
 - Odlične mehaničke karakteristike
 - Dobra kemijska otpornost
-
- *Fast curing*
 - *It can be applied in one thicker coat*
 - *Excellent adhesion to almost every surface*
 - *Excellent weather and UV resistance*
 - *The white colour reflects the most of solar radiation, considerably reducing internal temperature of buildings*



- *Resistant to extreme temperature range from -40°C to 80°C, withstands thermal shock to 200°C*
- *Excellent mechanical properties*
- *Good chemical resistance*

Potrošnja / Consumption

Minimalna ukupna potrošnja je 1,50 kg/m²
.....
Minimum total consumption is 1.50 kg/m²

Pakiranje / Packaging

Kante od 1kg, 6kg i 25kg
.....
Cans of 1kg, 6kg and 25kg

Boje / Colours

Bijela i siva
.....
White and grey

AKWAGARD DETAIL

Poliuretanski mastik za hidroizolacijsku obradu detalja
Polyurethane mastic for waterproofing of details

Primjena / Application

Hidroizolacija i brtvljenje:

- Spojeva različitih materijala
- Spojeva podova sa zidovima
- Spojeva dimnjaka sa podlogom
- Spojeva solarnih panela i klima jedinica
- Prodora cijevi
- Žljebova

.....
Waterproofing and sealing of:

- *Different materials connections*
- *Connections of floors with walls*
- *Chimney connections with subgrade*
- *Pipes penetrations*
- *Solar panels and air condition units joints*
- *Gutters*

Prednosti / Advantages

- Proizvod brzo umrežava i ne mjeħura se
- Izvršna prionjivost na gotovo svaku podlogu
- Nema potrebe za armiranjem proizvoda
- Izvršna otpornost na vremenske uvjete i UV zrake
- Otpornost na ekstremne temperature od -40°C do 80°C, podnosi temperaturni šok do 200°C
- Visoka elastičnost, čvrstoća na vlak i kidanje te otpornost na abraziju
- Odlična kemijska otpornost

-
- *Excellent adhesion to almost every type of subgrade*
 - *No need for net or fabric reinforcement*
 - *Fast curing and doesn't blister*
 - *Excellent weather and UV resistance*
 - *Excellent thermal resistance. Maximum service temperature is 80°C and maximum shock temperature is 200°C*
 - *Resistance to cold: product remains elastic even to -40°C*
 - *High tensile and tearing strength and resistance to abrasion*
 - *Good chemical resistance*



Potrošnja / Consumption

Minimalna potrošnja je 1.80 kg/m²
.....
Minimum consumption is 1.80 kg/m²

Pakiranje / Packaging

Kante od 1kg i 5kg
.....
Cans of 1kg and 5kg

Boje / Colours

Siva
.....
Grey

AKWAGARD T

Poliuretanska tekuća prozirna membrana
Polyurethane liquid translucent membrane

Primjena / Application

Hidroizolacija i zaštita:

- Terasa i balkona preko postojeće keramike
- Kamena
- Drva

Waterproofing and protection for:

- *Terraces and balconies over existing ceramics*
- *Stone*
- *Wood*



Prednosti / Advantages

- Prionjivost na gotovo svaku podlogu
- Otpornost na vremenske uvjete i uv zrake
- Kemijska otpornost
- Otpornost na ekstremne temperature od -40°C do 200°C (šok)
- Visoka čvrstoća na vlak i kidanje te otpornost na abraziju
- *Adhesiveness to nearly any surface*
- *Weather and UV radiation resistant*
- *Chemical resistance*
- *Resistant to extreme temperatures from -40°C to 200°C (shock)*
- *Tensile and breaking strength and abrasion resistance*



Potrošnja / Consumption

Minimalna ukupna potrošnja: 0,2 - 1,0 kg/m² (ovisno o podlozi i stupnju zaštite)

Minimal total consumption: 0.2 - 1.0 kg/m² (depends on the surface and degree of protection)



Pakiranje / Packaging

Kante 1 l i 4 l

1 l and 4 l buckets

Boje / Colours

Bezbojan (transparentan)

Colourless (transparent)

AKWAGARD TOP

Jednokomponentna elastična poliuretanska smola - lak
Single-component elastic polyurethane resin - lacquer

Primjena / Application

- Završni sloj kod PU hidroizolacije terasa i balkona
- Prozirna hidroizolacija balkona iznad kamena, mramora, drva, u pukotinama itd.
- Završni premaz za PU i industrijske podove za vanjske i unutrašnje aplikacije
- Zaštita drva (lakiranje), kamena, mramora, betona, čelika itd.
- U pomorskoj industriji
-
- *Finishing layer for PU waterproofing of terraces and balconies*
- *Transparent waterproofing of balconies above stone, marble, wood, in cracks, etc.*
- *Finishing coating for PU and industrial floors for both internal and external applications*
- *Protection of wood (lacquer), stone, marble, concrete, steel etc.;*
- *In the naval industry*

Prednosti / Advantages

- Jednostavna aplikacija
- Stvara prozirnu membranu, ne žuti
- Visoko otporan na hidrolizu
- Odlična kemijska otpornost
- Odlična otpornost na abraziju
- Ostaje elastičan čak i na vrlo niskim temperaturama
- Pigmentiran daje stabilnu boju
-
- *Simple application*
- *Creates a translucent membrane, does not turn yellow*
- *Highly resistant to hydrolysis*
- *Excellent chemical resistance*
- *Excellent resistance to abrasion*
- *Remains elastic even at very low temperatures*
- *Has stable colour if pigmented*



Potrošnja / Consumption

Maksimalna potrošnja po jednom sloju je 150 g/m²
.....
Maximum consumption per layer is 150 g/m²

Pakiranje / Packaging

Kante 1 l i 4 l
.....
1 l and 4 l buckets

AKWAGARD PB 2K

Dvokomponentna tekuća poliuretan-bitumenska membrana
Two-component liquid polyurethane-bitumen membrane

Primjena / Application

Za hidroizolaciju i zaštitu:

- Krovova (u zatvorenom sustavu)
- Objekata odvodnje otpadnih voda (kanalizacija)
- Mostova
- Ukopanih tunela
- Podrumskih zidova i temelja
- Žardinjera
- Ploča od cementa
- Bitumena i asfalta
- EPDM membrana

Napomena: proizvod ne smije ostati izložen UV zračenju (sunčevom zračenju).

.....
Waterproofing and protection for:

- *Roofs (in a closed system)*
- *Wastewater disposal facilities (sewage system)*
- *Bridges*
- *Dug tunnels*
- *Basement walls and foundations*
- *Planters*
- *Cement plates*
- *Bitumen and asphalt*
- *EPDM membranes*

Note: the product must not remain exposed to UV radiation (solar radiation)

Potrošnja / Consumption

Minimalna ukupna potrošnja: 1,20 l/m²

.....
Minimal total consumption: 1.20 l/m²

Pakiranje / Packaging

Komplet kanti od 2 l (1 l + 1 l), 10 l (5 l + 5 l) i 40 l (20 l + 20 l)

.....
Set of 2 l (1 l + 1 l), 10 l (5 l + 5 l) and 40 l (20 l + 20 l) buckets



Prednosti / Advantages

- Može se aplicirati u jednom debljem sloju bez bubrenja ili drugih defekata
- Može se koristiti za ispunu dilatacijskih reški uobičajene širine
- Izvrsna prionjivost na gotovo svaku podlogu
- Otpornost na ekstremne temperature od -40°C do 200°C (šok)
- Odlična kemijska otpornost
- Parna brana
- *Can be applied in a single, thick layer without swelling or other defects*
- *Can be used for filling expansion joints of standard width*
- *Excellent adhesiveness to nearly any surface*
- *Resistant to extreme temperatures from -40°C to 200°C (shock)*
- *Excellent chemical resistance*
- *Vapour barrier*

AKWAGARD H₂O 2K

Dvokomponentni poliuretanski elastični premaz za hidroizolaciju spremnika vode
Two-component polyurethane elastic waterproofing coating for water containers

Primjena / Application

- Hidroizolacija i zaštita spremnika za vodu napravljenih od betona ili čelika
- Hidroizolacija i zaštita spremnika pitke vode
- *Waterproofing and protection for concrete or steel water containers;*
- *Waterproofing and protection for drinking water containers*

Prednosti / Advantages

- Izvrsna prionjivost na podlogu
- Bez organskih otapala, jednostavan za upotrebu u zatvorenim područjima
- Vrlo visoka hidrofobnost i otpornost na hidrolizu
- Temperaturna otpornost od -40°C do 90°C
- Odlična kemijska otpornost
- Visoka elastičnost
- Certificiran u skladu s zahtjevima Europske Unije za spremnike pitke vode
- *Excellent adhesiveness to the surface*
- *No organic solvents, simple use in closed areas*
- *Very high hydrophobicity and resistant to hydrolysis*
- *Temperature resistance from -40°C to 90°C*
- *Excellent chemical resistance*
- *High elasticity*
- *Certified for compliance with the EU requirements for drinking water containers*

Potrošnja / Consumption

Minimalna ukupna potrošnja: 1,4 kg/m² u dva sloja
Minimal total consumption: 1.4 kg/m² in two layers

Boje / Colours

Slonova kost (izložen UV zračenju mijenja boju u oker ne gubeći ostala svojstva)
Ivory (changes colour with exposure to UV radiation into ochre while retaining all other properties)



Pakiranje / Packaging

Komplet kanti od 9 kg (1,5 kg + 7,5 kg)
9 kg set of buckets (1.5 kg + 7.5 kg)

AKWAGARD ST MARINE

Jednokomponentna poliuretanska tekuća membrana
Single-component polyurethane liquid membrane

Primjena / Application

Hidroizolacija i zaštita:

- Paluba
- Kabina
- Laganih krovova od metala ili fibrocementa
- Mokrih čvorova na brodovima

.....
Waterproofing and protection for:

- Decks
- Cabins
- Light roofs made of metal or fibrocement
- Sanitary facilities on boats

Prednosti / Advantages

- Izvrsna prionjivost na podlogu
- Izvrsna otpornost na vremenske uvjete i UV zrake
- Bijela boja reflektira većinu sunčeve energije i tako znatno smanjuje temperaturu u unutrašnjosti broda
- Otpornost na ekstremne temperature od -40°C do 200°C (šok)
- Visoka elastičnost, čvrstoća na vlak i kidanje te otpornost na abraziju

-
- *Excellent adhesiveness to surface*
 - *Excellent resistance to weather and UV radiation*
 - *The white colour reflects most sunlight, significantly reducing the internal temperature of the boat*
 - *Resistant to extreme temperatures from -40°C do 200°C (shock)*
 - *High elasticity, tensile and breaking strength, and abrasion resistance*

Potrošnja / Consumption

Minimalna ukupna potrošnja u dva sloja je 1,50 kg/m²

.....
The minimum total consumption for two layers is 1.50 kg/m²



Pakiranje / Packaging

Kanta od 1 kg

.....
Buckets of 1 kg

Boje / Colours

Bijela i siva

.....
White and grey

AKWAGARD TOP MARINE

Prozirni elastični poliuretanski premaz za drvene površine
Transparent elastic polyuretane coating for wooden surfaces

Primjena / Application

Zaštita:

- Drvenih podova
- Drvenih paluba
- Drvenog namještaja
- Drvenih prozora i vrata
- Premaza AKWAGARD ST MARINE

.....
Protection for:

- *Wooden floors*
- *Wooden deck*
- *Wooden furniture*
- *Wooden windows and doors*
- *Coating AKWAGARD ST MARINE*

Prednosti / Advantages

- Jednostavna aplikacija
 - Proziran, ne žuti
 - Čvrsta veza s podlogom
 - Izvrsna otpornost na vremenske uvjete i UV zrake
 - Odlična kemijska otpornost
 - Odlična otpornost na abraziju
 - Otpornost na visoke temperature (do 80°C)
 - Paropropustan
-
- *Simple application*
 - *Transparent, does not turn yellow*
 - *Excellent bond to substrate*
 - *Excellent resistance to weather and UV radiation*
 - *Excellent chemical resistance*
 - *Excellent resistance to abrasion*
 - *Resistant to high temperatures (to 80°C)*
 - *Vapor permeable*

Potrošnja / Consumption

Maksimalna potrošnja po jednom sloju je 150 g/m²
.....
Maximum consumption per layer is 150 g/m²



Pakiranje / Packaging

Kanta od 1 l

.....
1 l bucket

Boje / Colours

Bezbojan (transparentan)

.....
Colourless (transparent)

04

Jednoslojne krovne
membrane

*Single-ply roofing
membranes*

AKWALAN

Jednoslojna TPO membrana za hidroizolaciju krovova
Single-layer TPO membrane for roof waterproofing

Primjena / Application

Hidroizolacija krovova

.....
Roof waterproofing

Prednosti / Advantages

- Otporan na UV zračenje
- Podnosi ekstremne temperaturne oscilacije
- Zagrijava se par stupnjeva više od okolnog zraka – hladni krov
- Ugrađuje se kao izložena ili opterećena membrana
- Mogućnost ugradnje tijekom čitave godine
- Jednostavna obrada kritičnih detalja
- Neškodljiv za okoliš
-
- *Resistant to UV radiation*
- *Tolerates extreme temperature oscillations*
- *Heats up to a few degrees more than the surrounding air – cold roof*
- *Installed as a surface-exposed or loaded membran*
- *Can be installed during the entire year*
- *Simple processing for critical details*
- *Not harmful for the environment*


Pakiranje / Packaging

Debljina 1,2 mm ili 1,5 mm, role širine 1,22 m, 1,52 m, 1,83 m ili 2,44 m i dužine 30,5 m

.....
Thickness 1.2 mm or 1.5 mm, rolls with widths of 1.22 m, 1.52 m, 1.83 m, or 2.44 m and a length of 30.5 m

AKWALAN SUSTAV

- PRIČVRSNA ŠINA FeZn
- AKWALAN SREDSTVO ZA ČIŠĆENJE SPOJEVA
- AKWALAN SREDSTVO ZA BRTVLJENJE
- VERTIKALNI / HORIZONTALNI TPO SLIVNIK
- TPO ODZRAČNIK
- TPO OBUJMICA ZA PRODORE

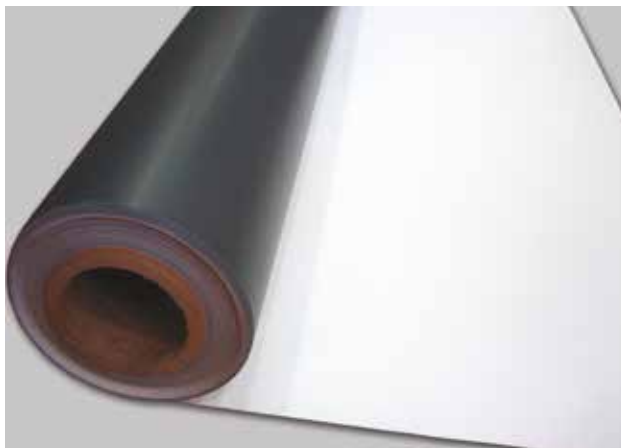

- VANJSKI / UNUTARNJI TPO KUT
- MREŽICA ZA SLIVNIKE
- AKWALAN PODLOŽNE PLOČICE SA ILI BEZ ŠILJAKA
- KUKA ZA ISPITIVANJE VAROVA
-
- *FeZn RAIL ANCHOR*
- *AKWALAN JOINT CLEANING AGENT*
- *AKWALAN SEALING AGENT*
- *VERTICAL / HORIZONTAL TPO GULLY*
- *TPO CHIMNEY*
- *TPO PENETRATION COLLAR*
- *TPO OUTSIDE / INSIDE CORNER*
- *GULLY NET*
- *AKWALAN WASHERS WITH OR WITHOUT FASTENERS*
- *HOOK FOR SOLDERING TESTING*

AKWALAN

Jednoslojna TPO membrana za hidroizolaciju krovova
Single-layer TPO membrane for roof waterproofing



AKWALAN LT

Jednoslojna TPO membrana za hidroizolaciju krovova
Single-ply TPO membrane for roof waterproofing

Primjena / Application

Hidroizolacija krovova

.....
Roof waterproofing

Prednosti / Advantages


- *Otporan na UV zračenje*
- Podnosi ekstremne temperaturne oscilacije
- Zagrijava se par stupnjeva više od okolnog zraka – hladni krov
- Fleksibilnost na nižim temperaturama
- Visoka mehanička otpornost
- Jednostavna obrada kritičnih detalja
- Neškodljiv za okoliš

-
- *Resistant to UV radiation*
 - *Withstands extreme temperature span*
 - *It gets warmer few degrees above air temperature – cool roof*
 - *Flexible at low temperatures*
 - *Simple workup of critical details*
 - *Eco friendly*
 - *High mechanical resistance*

Pakiranje / Packaging

Debljina 1,2 mm ili 1,5 mm, role širine 1,05 m ili 2,10 m i dužine 20 m i 25 m

.....
Thickness 1,2 mm or 1,5 mm, rolls widths of 1,05 m or 2,10 m and rolls lengths of 20,0 or 25,0 m.

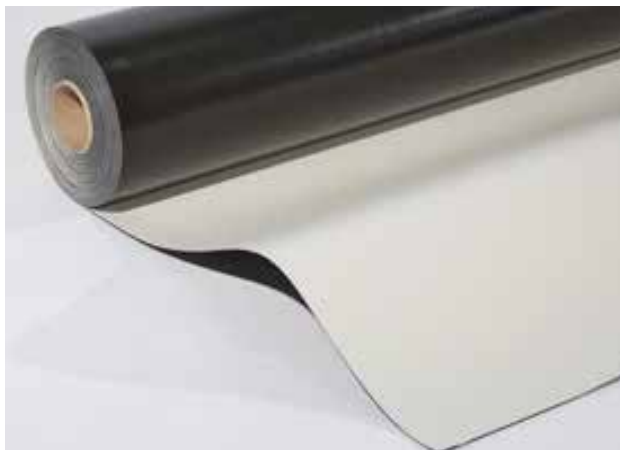

AKWALAN PVC

Jednoslojna PVC membrana za hidroizolaciju krovova
Single-ply PVC membrane for roof waterproofing

Primjena / Application

Hidroizolacija krovova

.....
Roof waterproofing

Prednosti / Advantages

- Izuzetno dugotrajna
- Odlična UV stabilnost
- Odlična fleksibilnost na nižim temperaturama
- Visoka mehanička otpornost te otpornost na probijanje i kidanje
- Jednostavna obrada detalja
- Može se reciklirati

-
- *Long lasting*
 - *Excellent UV stability*
 - *Excellent foldability at low temperatures.*
 - *Excellent mechanical characteristics, highly resistant to puncture and tearing*
 - *Simple details workability*
 - *It can be recycled*

Pakiranje / Packaging

Debljina 1,5 mm, 1,8 mm ili 2,0 mm, role širine 1,04 m ili 2,05 m i dužine 20 m i 30 m

.....
Thickness 1,5 mm, 1,8 mm or 2,0 mm, rolls widths of 1,04 m or 2,05 m and rolls length of 20 m or 30 m



05

Geotekstili

Geotextiles

AKWATEX

Geotekstili Geotextiles

Primjena / Application

Podložni i zaštitni sloj kod ugradnje AKWALAN membrane, filterski i razdjelni sloj kod nasipanja različitih frakcija agregata ili tla.

The base and protective layer in the installation of the AKWALAN membrane, the filter, and distribution layer for filling various aggregate or soil fractions.

Prednosti / Advantages

- Velika otpornost na oštećenja
 - Izrađeni iz djevičanskog polipropilena, dug vijek trajanja
 - Zadržavaju funkciju za koju su projektirani i nakon svih naprezanja prilikom ugradnje
 - Zadovoljavaju sve zahtjeve glede odvajanja, stabilizacije, drenaže, filtracije i zaštite
 - Dvije vrste – 200 g/m² debljine 2,2 mm i 300 g/m² debljine 3 mm
-
- *High resistance to damage*
 - *Created from virgin polypropylene, long life*
 - *Maintain the function they were designed for even after all the tension involved in installation*
 - *Meet all requirements pertaining to separation, stabilisation, drainage, filtration and protection*
 - *Two types – 200 g/m² with a thickness of 2.2 mm and 300 g/m² with a thickness of 3 mm*

Pakiranje / Packaging

Role dužine 100 m i širine 2 m

Rolls 100 m in length and 2 m in width



06

Parne brane

Vapour barriers

AKWAPOR PE / PE AL

Parne brane
Vapour barriers

Primjena / Application

Parna brana u kosim i ravnim krovovima, zidovima i spušenim stropovima.

Vapour barrier in sloped and level roofs, walls, and low ceilings.



Prednosti / Advantages

- Vlačna čvrstoća
- Otpornost na direktan kontakt s bitumenom, kamenom vunom, polistirenom i poliuretanom
- Toplinski reflektivni sloj od aluminijske folije vraća toplinu u unutrašnji prostor (Akwapor PE AL)
- Tensile strength
- Resistant to direct contact with bitumen, rock wool, polystyrene, and polyurethane
- Heat reflective aluminium layer returns heat to the inner area (Akwapor PE AL)

Pakiranje / Packaging

Role dužine 50 m i širine 100 cm

Rolls 50 m in length and 100 cm in width

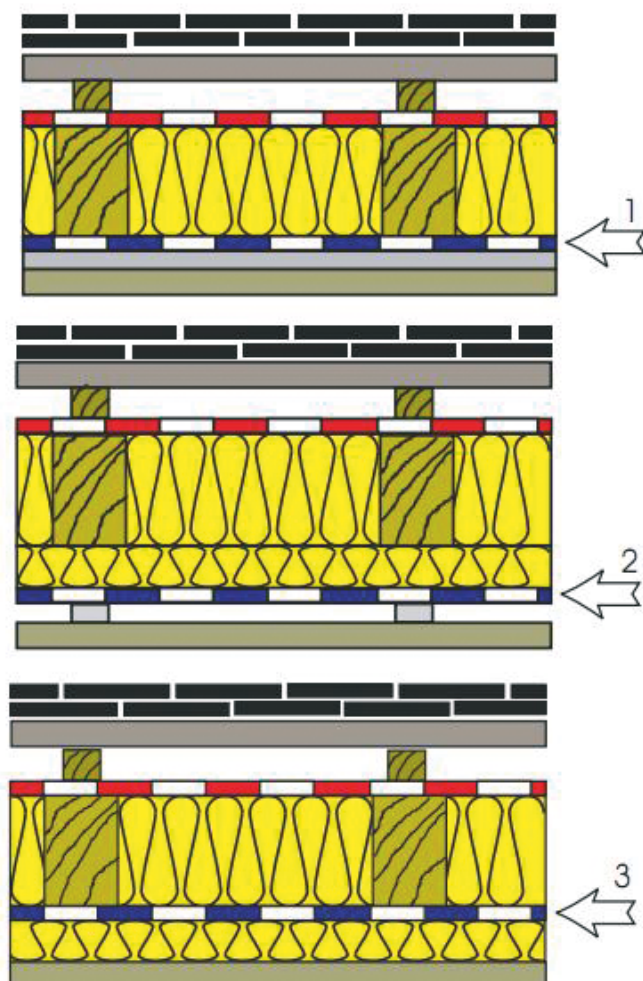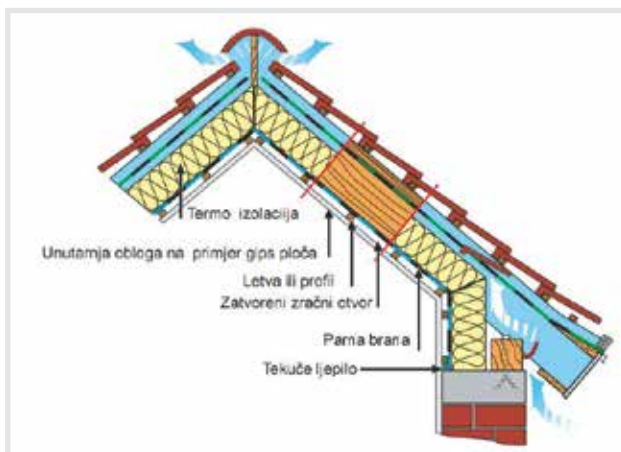

07

Hidroizolacijski i
dekorativni premazi

*Waterproofing and
decorative coatings*

AKWAPOOL EPOX 2K

Dvokomponentni epoksidni premaz u boji za bazene
Two-component coloured epoxy coating for pools

Primjena / Application

Hidroizolacija i zaštita:

- Bazena za plivanje
- Spremnika vode, uključivo i pitke vode
- Betonskih konstrukcija
- Čelika i drugih metalnih površina

.....
Waterproofing and protection for:

- *Swimming pools*
- *Water containers, including drinking water containers*
- *Concrete structures*
- *Steel and other metal surfaces*

Prednosti / Advantages

- Bez otapala
 - Izvrsno prianjanje na podlogu
 - Visoka čvrstoća na kidanje te otpornost na abraziju
 - Odlična kemijska otpornost
-
- *No solvents*
 - *Excellent adhesion to the surface*
 - *High tensile and breaking strength and abrasion resistance*
 - *Excellent chemical resistance*

Potrošnja / Consumption

Minimalna ukupna potrošnja u dva sloja je 0,60 kg/m²

.....
The minimum total consumption for two layers is 0.60 kg/m²

Pakiranje / Packaging


Komplet kanti od 6 kg (5 kg + 1 kg)

.....
6 kg set of buckets (5 kg + 1 kg)

Boje / Colours

Bijela i svjetlo plava

.....
White and light blue

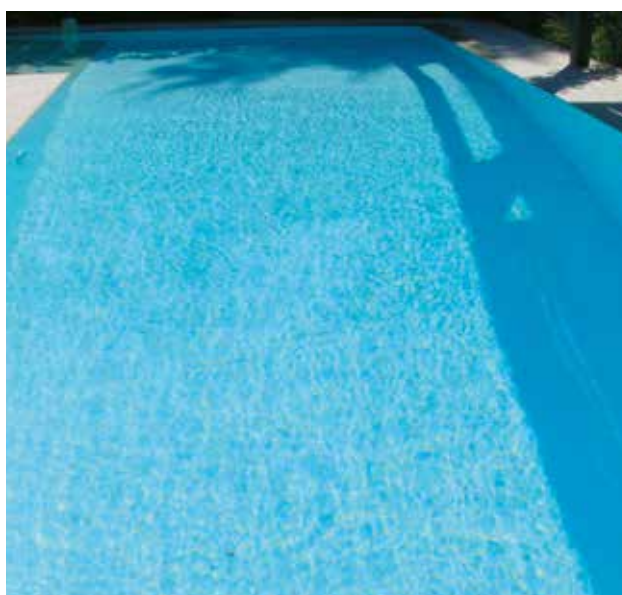

AKWAPOL EPOX 2K

Dvokomponentni epoksidni premaz u boji za bazene
Two-component coloured epoxy coating for pools



PAINT PROTECTION

Elastična zaštitna boja za fasade
Elastic protective paint for facades

Primjena / Application

- Hidroizolacijska zaštita ožbukanih zidova na bazi hidrauličnih veziva (cementne i produžne žbuke), čak i u slučaju sitnih mikropukotina
- Hidroizolacijska i anti-karbonatna zaštita betonskih konstrukcija, čak i ako su podložne manjim deformacijama
- Hidroizolacijska zaštita sustava toplinske izolacije
- Dekorativni premaz za polimer cementne hidroizolacijske premaze (Plastivo i Akwalastik)
- *Waterproofing for plaster walls based on hydraulic binders (cement and lime mortar), even in the case of small micro-fracturing*
- *Waterproofing and anti-carbonate protection of concrete structures, even if they are susceptible to small deformations*
- *Waterproofing for heat insulation*
- *Decorative coating for polymer cement waterproofing coatings (Plastivo and Akwalastik).*

Prednosti / Advantages

- Vodonepropusnost za kišu
- Zatvara mikropukotine
- Vrlo otporan na agresivne atmosferske elemente, fizičke i kemijske (npr. vjetar, smog itd.)
- Paropropustan
- Izvrsno prijanja na cementne podloge
- Elastičan (deformabilan)
- Otporan na UV zrake
- Garantira dobar estetski izgled
- Jednostavno se održava (prašina i smog se mogu ukloniti samo s mlazom vode)
- Može se pigmentirati u željeni ton boje
- *Rainproof*
- *Seals micro-fractures*
- *Very resistant to aggressive atmospheric elements, both physical and chemical (i.e. wind, smog etc.)*
- *Vapour-permeable*
- *Excellent adhesion to cement surface*
- *Elastic (deformable)*
- *Resistant to UV radiation*



- *Guarantees good aesthetics*
- *Simple maintenance (dust and smog can be removed by flushing with water)*
- *Pigment can be added to achieve the desired colour*

Potrošnja / Consumption

Jedna kanta pokriva oko 35 m² (0,4 lit/m² za oba sloja)
One bucket is sufficient to cover approx. 35 m² (0.4 l/m² for both layers).

Pakiranje / Packaging

Kanta od 14 l
14 l bucket

Boje / Colours

Bijela
White

08

Antikondenzacijski
premazi

*Anti-condensation
coatings*

AKWAPORE ST

Premaz protiv kondenzacije, pojave gljivica i plijesni na zidovima
Coating protecting from condensation, fungus and mould on walls

Primjena / Application

- Na svim hladnim površinama koje izazivaju kondenzaciju i širenje plijesni i gljivica
- Na armirano betonskim zidovima
- Na neizoliranim zidovima
- Na stupovima
- Protiv pojave hladnih mostova
-
- *All cold surfaces which cause condensation and the spread of fungus and mould*
- *Reinforced concrete walls*
- *On naked walls*
- *On columns*
- *Against thermal bridges*

Prednosti / Advantages

- Jednostavan za nanošenje
- Fizička, a ne kemijska zaštita
- Higijensko poboljšanje uvjeta stanovanja
- Proizvod je moguće obojiti bojom na bazi vode
-
- *Simple application*
- *Physical, not chemical protection*
- *Hygienic improvement of living environment*
- *The product can be coloured with water-based colours*

Potrošnja / Consumption

Ukupna potrošnja u 2 sloja je od 0,5 – 0,7 l/m²
.....
Total consumption in 2 layers ranges from 0.5 – 0.7 l/m²

Pakiranje / Packaging

Kante od 1 l i 5 l
.....
1 l and 5 l buckets

Boje / Colours

Bijela
.....
White



AKWAPORE CLEANER

Sredstvo za čišćenje i odstranjivanje gljivica i plijesni sa zidova
Product for cleaning and removal of fungi and mold from walls

Primjena / Application

- Na zidovima, plafonima, podovima
- Na pločnicima i fasadama
- Na žbuci
- Na vrtnom namještaju
- Na zidnim tapetima
-
- On walls, ceiling, floors
- On sidewalks and facades
- On plaster
- On garden furniture
- On wall papers



Prednosti / Advantages

- Jednostavan za nanošenje
- Spreman za upotrebu
- Ne izbljeđuje podlogu
- Ne zadrži klor ni kiseline
-
- Easy to apply
- Ready for use
- Does not bleaches treated surface
- Does not contain chlorine or acid



Potrošnja / Consumption

0,1 – 0,2 l/m²

.....
0,1 – 0,2 l/m²

Pakiranje / Packaging

Kantica s prskalicom od 0,75 l

.....
0,75l bucket with spray



09

Industrijski i
dekorativni podovi

*Industrial and
decorative floors*

AKWAFLOR PU 2K


Dvokomponentni samonivelirajući elastični poliuretanski pod
Two-component self-levelling elastic polyurethane floor

Primjena / Application

- Industrijski podovi
- Palube brodova
- Podovi u prehrambenoj, kemijskoj i farmaceutskoj industriji
- Podovi hladnjača
- Asfaltni podovi
- Parkirališta
- Podovi spremnika
-
- *Industrial floors*
- *Ship decks*
- *Floors in the food, chemical, and pharmaceutical industries*
- *Reefer floors*
- *Asphalt floors*
- *Parking lots*
- *Container floors*

Prednosti / Advantages

- Izvrsna prionjivost na gotovo svaku podlogu.
- Bez organskih otapala, idealan za zatvorene prostore
- Može se puniti kvarcnim pijeskom
- Dugo vrijeme rada prije umrežavanja
- Otpornost na temperature od -40°C do +80°C
- Visoka čvrstoća na vlak i kidanje te otpornost na abraziju
- Odlična kemijska otpornost
-
- *Excellent adhesiveness to nearly any surface*
- *No organic solvents, ideal for closed spaces*
- *Can be filled with quartz sand*
- *Long work life before polymerisation*
- *Resistant to temperatures from -40°C to +80°C*
- *Tensile and breaking strength and abrasion resistance*
- *Excellent chemical resistance*

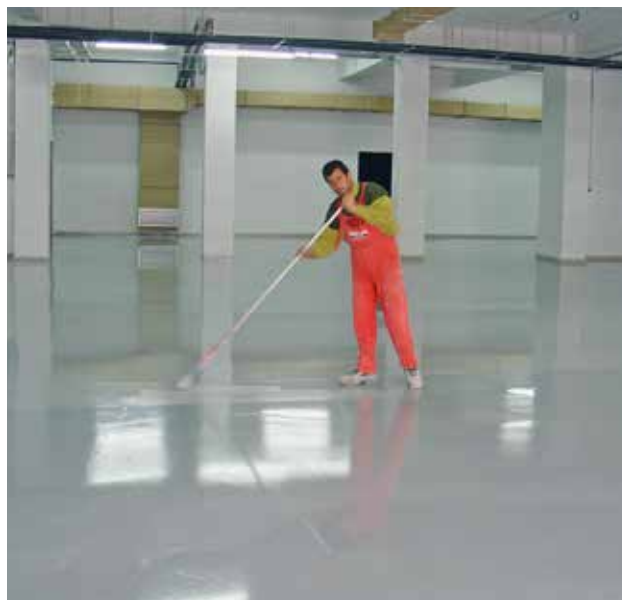

Potrošnja / Consumption

Ukupna potrošnja je 1,8 – 2 kg/m² (za debljinu od 2 mm u jednom sloju)

.....
Total consumption is 1.8 – 2 kg/m² (for thickness of 2 mm in one layer)

Pakiranje / Packaging

Komplet kanti od 5 kg (3,87 kg + 1,13 kg) i 20 kg (15,5 kg + 4,5 kg)

.....
5 kg set of buckets (3.87 kg + 1.13 kg) and 20 kg (15.5 kg + 4.5 kg)

AKWAFLOR EPOX 2K

Dvokomponentni samonivelirajući epoksidni pod
Two-component self-levelling epoxy floor

Primjena / Application

- Industrijski podovi
- Podovi bolnica
- Podovi u prehrambenoj, kemijskoj i farmaceutskoj industriji
- Podovi unutrašnjih garaža
- Podovi prodajnih centara
- Podovi hotela
-
- *Industrial floors*
- *Hospital floors*
- *Floors in the food, chemical, and pharmaceutical industries*
- *Inner garage floors*
- *Sales centre floors*
- *Hotel floors*

Prednosti / Advantages

- Bez otapala
- Visoka otpornost na udarce
- Visoka čvrstoća na vlak i kidanje te otpornost na abraziju
- Odlična kemijska otpornost
-
- *No solvents*
- *High impact resistance*
- *Tensile and breaking strength and abrasion resistance*
- *Excellent chemical resistance*

Potrošnja / Consumption

Minimalna ukupna potrošnja u dva sloja je 0,5 kg/m²
.....
The minimum total consumption for two layers is 0.5 kg/m²

Pakiranje / Packaging

Komplet kanti od 6 kg (5 kg + 1 kg)
.....
6 kg set of buckets (5 kg + 1 kg)



AKWAFLO PARK

Samonivelirajući poliuretanski zaštitni i završni premaz za podove
A self-levelling polyurethane finishing coating for floors

Primjena / Application

- Parkirališta
- Garaže
- Okućnice
- Podrumi
- Radionice
- Laboratoriji
- Mokri čvorovi
-
- *Parking lots*
- *Garage floors*
- *Lots*
- *Basements*
- *Workshops*
- *Laboratories*
- *Sanitary blocks*

Prednosti / Advantages

- Nema organskih otapala
- Odlična otpornost na opterećenje vozilima
- Otporan na kiseline, otapala, ulja, soli
- Otporan na starenje, cikluse smrzavanja i odmrzavanja i UV zračenje
- Ne zahtijeva posebno održavanje
-
- *No organic solvents*
- *Excellent resistance to load by vehicles*
- *Resistant to the effects of acids, solvents, oils, salts*
- *Resistant to aging, freezing-unfreezing cycles and UV radiation*
- *Does not require special maintenance*

Potrošnja / Consumption

0,6 kg/m² za dva sloja na glatkoj podlozi
.....
0.6 kg/m² for two layers on a smooth surface

Pakiranje / Packaging

Komplet kanti od 5 kg (4 kg + 1 kg)
.....
5 kg set of buckets (4 kg + 1 kg)



Boja / Colours

Siva, žuta, zelena i tamno crvena
.....
Gray, yellow, green and dark red

AKWAFLOR TOP

Jednokomponentni poliuretanski zaštitni premaz za podove
Single-component polyurethane protective floor coating

Primjena / Application

Hidroizolacija i zaštita:

- Metalnih konstrukcija
- Betona
- Industrijskih podova
- Rashladnih postrojenja
- Spremnika određenih kemikalija
- Spremnika otpadnih voda
- Cijevi (iznutra)

.....
Waterproofing and protection for:

- *Metal structures*
- *Concrete*
- *Industrial floors*
- *Cooling facilities*
- *Containers for certain chemicals*
- *Wastewater containers*
- *Piping (internally)*

Prednosti / Advantages

- Izvrsna prionjivost na beton i metal
 - Brzo umrežavanje
 - Potpuna hidrofobnost
 - Maksimalna šok temperatura 200°C
 - Visoka čvrstoća na vlak i kidanje te otpornost na abraziju
 - Odlična kemijska otpornost
-
- *Excellent adhesiveness to concrete and metal*
 - *Quick polymerisation*
 - *Complete hydrophobicity*
 - *Maximum shock temperature 200°C*
 - *Tensile and breaking strength and abrasion resistance*
 - *Excellent chemical resistance*

Potrošnja / Consumption

Maksimalna ukupna potrošnja u dva sloja je 300 g/m²
.....
The maximum total consumption for two layers is 300 g/m²



Pakiranje / Packaging

Kante od 5 kg i 20 kg
.....
Buckets of 5kg and 20kg

10

Impregnacije

Impregnations

PROTOGARD 1.0

Impregnacijska zaštita poroznih materijala od vode
Impregnation protection of porous material from water

Primjena / Application

- Zaštita fasada
- Zaštita terasa i balkona
- Zaštita okućnica
- Zaštita stubišta
- Zaštita površina od prirodnog kamena, betona, opeke, terakote, žbuke...
-
- *Facade protection*
- *Terrace and balcony protection*
- *Garden plot protection*
- *Stairwell protection*
- *Protection of natural stone, concrete, brick, terracotta, plaster (...) surfaces*

Prednosti / Advantages

- Mogućnost aplikacije na vertikalne, unutrašnje i vanjske površine
- Sprječava prodor tekućina na bazi vode
- Ograničava cvjetanje kamena
- Ograničava pojavu plijesni
- Sprječava propadanje zaštićene površine uslijed ciklusa smrzavanja i odmrzavanja
- Omogućava lakše čišćenje tretiranih površina
- Paropropusan
- Na bazi vode, bez otapala
- Uv otporan
- Nevidljiv nakon sušenja, ne mijenja izgled tretirane površine
- Jednostavno nanošenje
-
- *Possibility of application to vertical, inner and outer surfaces*
- *Prevents penetration of water-based liquids;*
- *Limits stone fracturing*
- *Limits mould*
- *Prevents the degradation of the protected surface due to freezing and unfreezing*
- *Facilitates cleaning of treated surfaces*
- *Vapour-permeable*
- *Water-based, no solvents*



- *UV resistant*
- *Invisible after drying, does not change the appearance of the treated surface*
- *Simple application*

Potrošnja / Consumption

Ovisno o poroznosti podloge 1 l PROTOGARDa 1.0 štiti 3 – 5 m² površine
.....
Depending on the porosity of the base surface 1 l of PROTOGARD 1.0 protects 3 – 5 m² of surface

Pakiranje / Packaging

Kante od 1 l i 5 l
.....
1 l and 5 l buckets

Boje / Colours

Bezbojan (transparentan)
.....
Colourless (transparent)

PROTOGARD 3.0

Impregnacijska zaštita poroznih materijala od vode, ulja i prljavštine
Impregnation protection of porous material from water, grease, and dirt

Primjena / Application

- Zaštita prirodnog kamena, betona, opeke, terakote, prefabriciranog cementnog kamena, asfalta, mortova i žbuke
 - Zaštita vanjskih površina - fasade, terase, balkoni, pješačke zone, nogostupi, prostor oko roštilja, parkirališta...
 - Zaštita unutrašnjih površina - podovi, stepeništa, kuhinjske radne površine, prostori oko kamina...
-
- *Protection of natural stone, concrete, brick, terracotta, prefabricated cement stone, asphalt, mortar, and plaster;*
 - *Protection of external surfaces - facades, terraces, balconies, pedestrian zones, sidewalks, areas around grills, parking lots...;*
 - *Protection of inner surfaces - floors, stairways, cooking workspaces, areas surrounding fireplaces....*

Prednosti / Advantages

- Može se nanositi na vertikalne i horizontalne, unutrašnje i vanjske površine
 - Spriječava prodor vode i ulja
 - Ograničava cvjetanje kamena
 - Omogućava lakše čišćenje mrlja
 - Ograničava pojavu plijesni
 - Spriječava propadanje uslijed smrzavanja i odmrzavanja
 - Paropropusan
 - Na bazi vode
 - UV otporan
 - Nevidljiv nakon sušenja
 - Jednostavno nanošenje
-
- *Possibility of application to vertical, horizontal, inner and outer surfaces*
 - *Prevents the penetration of water and grease;*
 - *Limits stone fracturing*
 - *Facilitates cleaning of stains*
 - *Limits mould*
 - *Prevents degradation due to freezing and unfreezing*



- *Vapour-permeable*
- *Water-based*
- *UV resistant*
- *Invisible after drying*
- *Simple application*

Potrošnja / Consumption

Ovisno o poroznosti podloge 1 l PROTOGARDA 3.0 štiti 3 – 5 m² površine

.....
Depending on the porosity of the base surface 1 l of PROTOGARD 3.0 protects 3 – 5 m² of surface

Pakiranje / Packaging

Kante od 1 l i 5 l

.....
1 l and 5 l buckets

Boje / Colours

Bezbojan (transparentan)

.....
Colourless (transparent)

PROTOGARD 1.0 | 3.0

Impregnacijska zaštita poroznih materijala od vode, ulja i prljavštine
Impregnation protection of porous material from water, grease, and dirt



PROTOGARD CLEANER 2.0

Sredstvo za čišćenje i odstranjivanje nečistoća i masnoća sa poliranog kamena
Product for cleaning and removal of dirt and grease from polished stone

Primjena / Application

- Polirani kamen
- Podne površine od plastike, PVC-a, betona, glinenih pločica, gume itd.
-
- *Polished stone*
- *Floors made of plastic, PVC, concrete, terracotta, rubber etc.*

Prednosti / Advantages


- Visoka efikasnost čišćenja
- Jednostavan za nanošenje
- Spreman za upotrebu
- Izvrsna kompatibilnost s različitim materijalima
- Dobro odstranjuje smolu
-
- *High efficiency cleaning*
- *Easy to apply*
- *Ready for use*
- *Excellent compatibility with a different materials*
- *Well removes resin*

Potrošnja / Consumption

Ovisi o stupnju onečišćenja podloge i tvrdokornosti mrlja
.....
Depends on the degree of contamination of surface and stains persistence

Pakiranje / Packaging

Kantica s prskalicom od 0,75 l
.....
0,75l bucket with spray

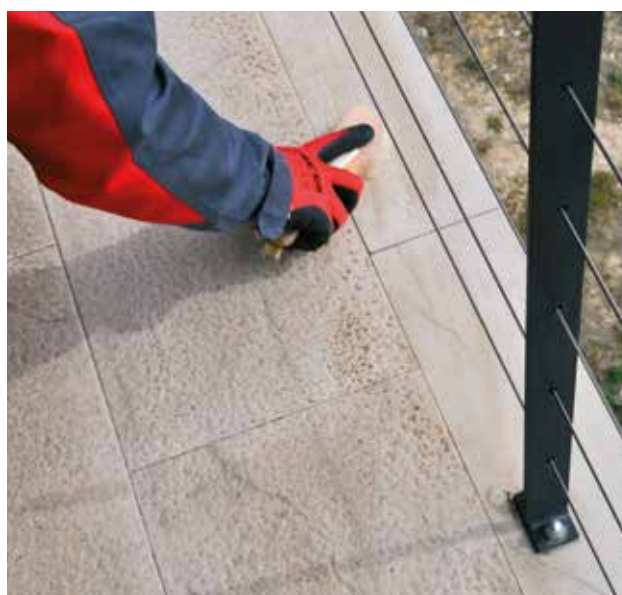

PROTOGARD CLEANER 4.0

Sredstvo za čišćenje i odstranjivanje kamenca, nečistoća i masnoća sa štokovanog kamena
Product for cleaning and removal of lime deposit, dirt and grease from rough surface stone

Primjena / Application

- Štokovani kamen
- Bazeni, kupaonice, sanitarni porculan, kromirane površine, nehrđajući čelik itd.
-
- *Rough surface stone*
- *Pools, bathrooms, sanitary porcelain, chrome finish, stainless steel etc.*

Prednosti / Advantages

- Visoka efikasnost čišćenja
- Jednostavan za nanošenje
- Spreman za upotrebu
- Ne uzrokuje korozivne pare
- Izvrsna kompatibilnost s različitim materijalima
-
- *High efficiency cleaning*
- *Easy to apply*
- *Ready for use*
- *Does not produce corrosive vapors*
- *Excellent compatibility with a different materials*

Potrošnja / Consumption

Ovisi o stupnju onečišćenja podloge i tvrdokornosti mrlja
.....
Depends on the degree of contamination of surface and stains persistence

Pakiranje / Packaging

Kantica s prskalicom od 0,75 l
.....
0,75l bucket with spray



PROTOGARD CLEANER MARINE

Sredstvo za čišćenje i odstranjivanje nečistoća i masnoća sa plastičnih brodova
Product for cleaning and removal of dirt and grease from plastic boats

Primjena / Application

- Palube
- Kabine
- Mokri čvorovi
- Prostor za motor
-
- Decks
- Cabins
- Sanitary facilities
- Engine rooms



Prednosti / Advantages

- Visoka efikasnost čišćenja
- Jednostavan za nanošenje
- Spreman za upotrebu
- Izvrsna kompatibilnost s različitim materijalima
-
- High efficiency cleaning
- Easy to apply
- Ready for use
- Excellent compatibility with a different materials



Potrošnja / Consumption

Ovisi o stupnju onečišćenja podloge i tvrdokornosti mrlja
Depends on the degree of contamination of surface and stains persistence

Pakiranje / Packaging

Kantica s prskalicom od 0,75 l
0,75l bucket with spray



11

Prajmeri

Primers

AKWAGARD PRIMO EPOX 2K

Epoksidni dvokomponentni prajmer na bazi vode
Water-based two-component epoxy primer

Primjena / Application

- Prajmer za neporozne podloge (beton, čelik, galvanizirani čelik, aluminij, kamen, keramiku...)
- Veza između starog i novog betona
- Idealan za neventilirana područja
- Prajmer za epoksidne, poliuretanske i polimercementne sustave
- Protuprašni premaz na betonskim podlogama (i u pigmentiranoj verziji) za: prehrambenu industriju, izložbene salone, škole, bolnice, pivovare itd.
- Barijera za vlagu (kapilarno udizanje)
-
- *Primer for non-porous base surfaces (concrete, steel, galvanised steel, aluminium, stone, ceramics...)*
- *Connection between old and new concrete;*
- *Ideal for non-ventilated areas*
- *Primer for epoxy, polyurethane, and polymer cement systems*
- *Anti-dust coating on concrete surfaces (also exists as pigmented version) for: food industry, factory outlets, schools, hospitals, breweries etc.*
- *Moisture barrier (capillary elevation)*

Prednosti / Advantages

- Izvršna prionjivost na beton, čelik, galvanizirani čelik, aluminij, kamen, keramiku
- Bez otapala, može se upotrebljavati i u neventiliranim područjima
-
- *Excellent adhesiveness to concrete, steel, galvanised steel, aluminium, stone, ceramics*
- *No solvents, can be used in non-ventilated areas as well*

Pakiranje / Packaging

Komplet kanti od 1 kg (0,25 kg + 0,75 kg) i od 4 kg (1 kg + 3 kg)
.....
1kg set of buckets (0.25 kg + 0.75 kg) and 4 kg (1 kg + 3 kg)



Potrošnja / Consumption

Ukupna potrošnja u jedan ili dva sloja od 200 g/m² (kao barijera za vlagu u više slojeva ukupne potrošnje od 600 g/m²)
.....

Total consumption in one or two 200 g/m² layers (as a multi-layer moisture barrier with a total consumption of 600 g/m²)

AKWAGARD PRIMO UNI 2K

Poliuretanski dvokomponentni prajmer za AKWAGARD sustav
Polyurethane two-component primer for the AKWAGARD system

Primjena / Application

- Prajmer za porozne podloge (beton, mramor i sl.)
- Prajmer za bitumenske trake i premaze
- Između dva sloja AKWAGARD sustava kada prođe više vremena između nanošenja (npr. više od 2 dana)
- *Primer for porous base surfaces (concrete, marble, etc.)*
- *Primer for bitumen strips and coatings;*
- *Between two layers of the AKWAGARD system when more time passes between applications (for instance, more than 2 days).*



Prednosti / Advantages

- Izvrsna prionjivost za podlogu
- Visoko hidrofoban
- Može se napuniti s mineralnim punilom za brtvljenje
- Može se upotrebljavati za lijepljenje i zasićenje geotekstila
- *Excellent adhesiveness to the base surface;*
- *Highly hydrophobic;*
- *Can be filled with a mineral sealant;*
- *Can be used for gluing and saturating geotextiles.*



Potrošnja / Consumption

Ovisno o poroznosti površine potrošnja je od 100 – 500 g/m²

Depending on surface porosity utilisation ranges between 100 – 500 g/m²

Pakiranje / Packaging

Komplet kanti od 4 kg (1,6 kg + 2,4 kg) ili od 1 kg (0,4 kg + 0,6 kg)

4 kg set of buckets (1.6 kg + 2.4 kg) or 1 kg (0.4 kg + 0.6 kg)



AKWAGARD PRIMO T

Jednokomponentni bezbojni prajmer za neporozne podloge
Single-component colourless primer for non-porous base surfaces

Primjena / Application

- Prajmer za poliuretansku hidroizolaciju AKWAGARD T
- Prajmer za glazirane pločice
- Prajmer za staklo
- Prajmer za blago porozan mramor
-
- *Primer for polyurethane waterproofing AKWAGARD T*
- *Primer for glossy tiles*
- *Primer for glass*
- *Primer for lightly porous marble*



Prednosti / Advantages

- Brzo sušenje
- Ne razrjeđuje se
- Ne ostavlja mrlje
- Jednostavna aplikacija
-
- *Quick drying*
- *Does not dilute*
- *Does not leave blemishes*
- *Simple application*



Potrošnja / Consumption

Ovisno o poroznosti podloge potrošnja je cca. 100 g/m²

.....
Depending on the porosity of the base surface utilisation is approx. 100 g/m²

Pakiranje / Packaging

Kanta od 1 l

.....
1 l bucket



AKWAGARD PRIMO PU

Poliuretanski jednokomponentni prajmer za porozne podloge
Polyurethane single-component primer for porous base surfaces

Primjena / Application

- Na poroznom betonu
- Na žbuci
- Na drvu
-
- *On porous concrete*
- *On plaster*
- *On wood*

Prednosti / Advantages

- Ne razrjeđuje se
- Jednostavna aplikacija
-
- *Does not dilute*
- *Simple application*

Potrošnja / Consumption

Maksimalna potrošnja je 150 g/m²
.....
Maximum consumption is 150 g/m²

Pakiranje / Packaging

Kanta od 1 l
.....
1 l bucket



AKWAGARD PRIMO ST

Poliuretanski jednokomponentni prajmer
Polyurethane single-component primer

Primjena / Application

- Prajmer za vlažan i mokar beton
- Prajmer za keramičke pločice
- Prajmer za neporozne podloge (staklo, polirani kamen, metal...)
- Zaštitni premaz za beton (brtvljenje površine)
-
- *Primer for moist and wet concrete*
- *Primer for ceramic tiles*
- *Primer for non porous substrates (glass, polished stone, metal...)*
- *Protective coating for concrete (sealing of surface)*



Prednosti / Advantages

- Niska viskoznost
- Lako nanošenje (čak i na vlažan beton)
- Čvrsta veza s glatkim i neporoznim podlogama
- Elastičan
- Bez otapala
-
- *Low viscosity*
- *Easy to apply (even on damp concrete)*
- *Strong adhesion on polished and non-porous substrates*
- *Elastic*
- *Solvent free*



Potrošnja / Consumption

Ukupna potrošnja 100 - 500 g/m²

.....
Total consumption 100 - 500 g/m²

Pakiranje / Packaging

Kanta od 1 kg

.....
1kg bucket



12

Proizvodi za sanacije

Products for repairs

TAP 3

Brzovezujuće hidrauličko vezivo za sprječavanje prodora vode kroz konstrukciju
Quick fixing hydraulic binder for the prevention of water penetration through the structure

Primjena / Application

- Brzo blokiranje lokalnih vodenih tokova, čak i pod tlakom
- Brze intervencije i popravci kod hidroizolacijskih radova
- Brtvljenje pukotina u kombinaciji s hidroekspanzivnom pastom
- *Quick blocking of local watercourses, even under pressure*
- *Quick interventions and repairs for waterproofing works*
- *Sealing of fissures with the use of hydro-expansive paste*



Prednosti / Advantages

- Odlične mehaničke karakteristike postiže u kratkom vremenu
- Primjenjiv čak i kod vode pod tlakom
- Odlična tiksotropnost
- Ne skuplja se i jednostavan je za rad
- *Excellent mechanical characteristics are attained within a short time;*
- *Usable even with pressurised water*
- *Excellent thixotropy*
- *Does not contract and it is simple to work with*



Potrošnja / Consumption

Kutija od 5 kg daje 3 lit žbuke

A 5 kg box results yields 3 litres of mortar

Pakiranje / Packaging

Kutija od 5 kg

5 kg box



SPIDY 15

Brzovezujući cementni mort
Quick fixing cement mortar

Primjena / Application

- Brze sanacije betonskih elemenata, rubova na stupovima, gredama i nosačima te balkonima
- Pričvršćivanje metalnih elemenata u betonu
- Brze reprofilacije površinskih oštećenja na betonu: gnijezda, zaštitu čeličnih šipki, odlomljenih dijelova betona
- Brze intervencije s ciljem pripreme podloge za nanošenje hidroizolacije
- Brzo postavljanje okvira vrata i prozora i električnih instalacija
- *Quick repairs for cement elements, column edges, beams, and load bearing elements as well as balconies*
- *Fixing metal elements in the concrete;*
- *Quick re-profiling for surface damage on concrete: beds, protection of steel girders, broken-off concrete sections*
- *Quick interventions for the purpose of preparing a base for the application of waterproofing*
- *Quick installation of door frames and windows and electrical installations*

Prednosti / Advantages

- Odlična tiksotropnost
- Jednostavan za rad
- Vrlo dobra prionjivost na beton i armaturu
- Brzo vezuje čak i na vlažnim podlogama
- *Excellent thixotropy*
- *Simple for use*
- *Very good adhesiveness to concrete and reinforcements*
- *Quick bonding even on moist surfaces*

Potrošnja / Consumption

18 kg/m² za 1 cm debljine; vreća od 15 kg daje 8,5 lit morta

18 kg/m² per 1 cm of thickness; a 15 kg sack yields 8.5 litres of mortar



Pakiranje / Packaging

Vreća od 15 kg

15 kg sack

FLEXOMIX 30

Mikroarmirani polimercementni mort
Micro-reinforced polymer-cement mortar

Primjena / Application

- Površinska reprofilacija oštećenih stupova i greda
- Popravci prozorskih okana
- Popravci površinskih nepravilnosti na betonu
- Popravci oštećenih, korodiranih, armirano-betonskih konstrukcija
- *Surface re-profiling of damaged columns and beams*
- *Windowpane repairs*
- *Repair of surface irregularities on concrete;*
- *Repairs of damaged, corroded, reinforced-concrete structures*



Prednosti / Advantages

- Stabilnost na vibracije i temperaturne promjene
- Otporan na agresivne atmosferske kemikalije te na cikluse smrzavanja i odmrzavanja
- Vrlo dobra prionjivost na beton i armaturu
- Može se aplicirati od 3 – 20 mm u jednom sloju
- *Vibration and heat stability;*
- *Resistant to aggressive atmospheric chemicals and freezing and de-freezing cycles;*
- *Very good adhesiveness to concrete and reinforcements;*
- *Can be applied within 3 – 20 mm in a single layer*



Potrošnja / Consumption

17 kg/m² za 1 cm debljine; vreća od 25 kg daje 16 lit morta

17 kg/m² per 1 cm of thickness; a 25 kg bag yields 16 litres of mortar

Pakiranje / Packaging

Vreća od 25 kg

25 kg sack



FIBROMIX 40

Mikroarmirani polimercementni mort
Micro-reinforced polymer-cement mortar

Primjena / Application

- Sanacije i ojačanja betonskih konstrukcija kao što su stupovi, grede, nosači i ploče
- Reprofiliranje betonskih konstrukcija
- Sanacije vijadukata, mostova i brana
- *Repairs and reinforcement of concrete structures such as columns, beams, load-bearing structures, and plates;*
- *Re-profiling concrete structures*
- *Viaduct, bridge, and dam repairs*



Prednosti / Advantages

- Tiksotropnost
- Povećana prionjivost na beton i armaturu
- Otporan na agresivne atmosferske kemikalije te na cikluse smrzavanja i odmrzavanja
- Može se aplicirati u slojevima do 5 cm
- Lagan za rad
- *Thixotropy*
- *Increased adhesiveness to concrete and reinforcements*
- *Resistant to aggressive atmospheric chemicals and freezing and de-freezing cycles*
- *Can be applied in layers of up to 5 cm*
- *Simple for use*



Potrošnja / Consumption

18 kg/m² za 1 cm debljine; vreća od 25 kg daje 14 lit morta

18 kg/m² per 1 cm of thickness; a 25 kg bag yields 14 litres of mortar

Pakiranje / Packaging

Vreća od 25 kg

25 kg sack



AKWAGARD EPOX FIXER

Dvokomponentna tiksotropna epoksidna smola za popravke
Two-component thixotropic epoxy resin for fixing

Primjena / Application

- Ljepilo (za cementne mortove, metalne konstrukcije i spojeve novog i starog betona)
- Sredstvo za ispunu pukotina i brtvljenje (stupova, temelja, greda, zidova)
- Ispuna neravnina (spremnici vode, rashladne jedinice...)
-
- *Adhesive (for cement mortars, metal structures and connection of new with old concrete)*
- *Product for filling cracks and sealing (columns, foundations, beams and walls)*
- *Filling of irregularities (water tanks, cooling units...)*

Prednosti / Advantages

- Ne skuplja se nakon stvrdnjavanja
- Odlična tiksotropnost
- Odlična prionjivost
- Odlična otpornost na lužine, kiseline, ulja i otapala
-
- *Does not shrink after curing*
- *Excellent thixotropy*
- *Excellent adhesion*
- *Excellent resistance to alkali, acid, oil and solvents*

Potrošnja / Consumption

1,5 kg/m² za 1 mm debljine

.....
1,5 kg/m² for 1 mm of thickness

Pakiranje / Packaging

Komplet kanti od 0,99 kg (0,33 kg + 0,66 kg)

.....
0,99 kg set of buckets (0,33 kg + 0,66 kg)



KONSTRUKTIVNA OJAČANJA

Platna i veziva za ojačanje konstrukcija
Fibre fabric and binders for structural reinforcements

Primjena / Application

- Sanacije betonskih i zidanih konstrukcija
- Povećanje nosivosti konstruktivnih elemenata od betona i drva
- Sidrenja
-
- *Sanation of concrete and masonry structures*
- *Load capacity increasing of structural elements made of concrete and wood*
- *Anchoring*


Prednosti / Advantages

- Širok raspon elemenata za ojačanje (karbonska platna i lamele, staklena vlakna, aramidna i karbonska užad)
- Širok raspon veziva (epoksidne smole, epoksidna ljepljiva i specijalna hidraulična veziva)
- Minimalno invazivan način ojačavanja konstrukcija
- Manja težina sustava u odnosu na konvencionalna rješenja sa čelikom
- Brzo izvođenje
-
- *A wide range of elements for reinforcement (carbon fibre fabrics and lamellas, glass fiber fabrics, aramid and carbon ropes)*
- *A wide range of binders (epoxy resins, epoxy adhesives and special hydraulic binders)*
- *Minimum invasive way of construction strengthening*
- *Lighter weight of system compared to conventional solutions with steel*
- *Fast application*

Potrošnja / Consumption

Ovisno o primjeni

.....
Depending on the application

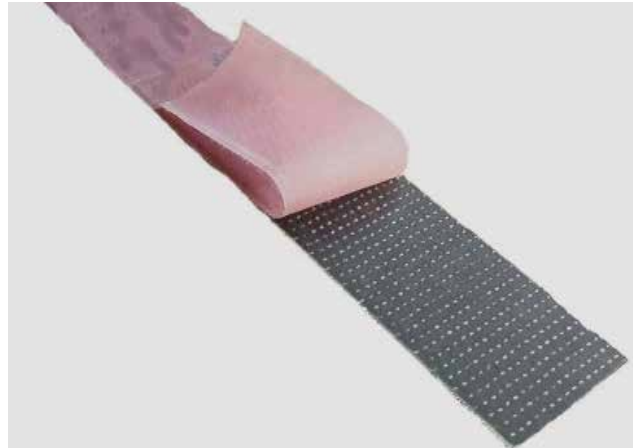

13

Lagani termobetoni

*Light thermal
concrete*

DRACOTERM

Super lagani termobeton
Super-light thermal concrete

Primjena / Application

- Podloga za podove
- Ispuna prostora u konstrukcijama
- Sloj za pad na terasama i ravnim krovovima, uključujući i postavljanje hidroizolacijskog sloja izravno na DRACOTERM
- Ispuna šupljina (i u velikoj debljini sloja)
-
- *Floor surface base*
- *Filling gaps in structures*
- *Slope layer for terraces and level roofs, including the installation of the waterproofing layer directly to DRACOTERM*
- *Filling gaps (and with large layer thicknesses)*

Prednosti / Advantages

- Smanjuje nepotrebni teret i olakšava konstrukciju
- Ravni krovovi su manje osjetljivi na velike klimatske i temperaturne razlike
- Omogućava jednostavnu i brzu sanaciju ravnih krovova, terasa, i balkona uz povećanje toplinske zaštite objekta
- Odlično prigušenje udarnog zvuka
- Izravno postavljanje hidroizolacije na DRACOTERM
- Nezapaljiv
- Potpuno neutralan i neškodljiv za okoliš
- Snižava troškove gradnje
-
- *Reduces unnecessary load and facilitates construction*
- *Level roofs are less sensitive to great variations in climate and temperature*
- *Provides for simple and quick repairs of level roofs, terraces, and balconies for increasing thermal protection of structures*
- *Excellent impact noise dampening*
- *Direct installation of waterproofing on DRACOTERM*
- *Flame retardant*
- *Completely neutral and not harmful for the environment*
- *Lowers construction costs*



Pakiranje / Packaging

Vreća od 420 l

.....
420 kg sack

14

Proizvodi za
brtvljenje

Sealing products

AKWAFLEX 2.5

Jednokomponentni poliuretanski kit za vertikalne i horizontalne spojeve
Single-component polyurethane kit for vertical and horizontal joints

Primjena / Application

- Brtvljenje spojeva u građevinarstvu (vrata, prozori, sanitarije, dilatacije, spojevi...)
- Brtvljenje spremnika vode
- Brtvljenje kanala za navodnjavanje
- Brtvljenje podrumskih zidova
- Brtvljenje prefabriciranih betonskih elemenata
- Brtvi beton, drvo, mramor, aluminij, čelik, keramiku, gipsane ploče itd.
-
- *Sealing joints in construction (doors, windows, utility, expansions, joints...)*
- *Sealing water containers*
- *Sealing irrigation canals*
- *Sealing basement walls*
- *Sealing prefabricated concrete elements*
- *Seals concrete, wood, marble, aluminium, steel, ceramics, gypsum plates, etc*

Prednosti / Advantages

- Jednostavan i ekonomičan za upotrebu
- Jednokomponentan
- Izvrsna otpornost na starenje
- Ostaje elastičan i do -40°C
- Dobra otpornost na mikroorganizme i razne kemikalije
- Dobra prionjivost na gotovo svaku podlogu
-
- *Simple and cost-effective for use*
- *Single-component*
- *Excellent resistance to aging*
- *Elastic at up to -40°C*
- *Good resistance to micro-organisms and various chemicals*
- *Good adhesiveness to nearly any surface*

Potrošnja / Consumption

Ovisno o širini i dubini reške
.....
Depends on the width and depth of the joint



Pakiranje / Packaging

„Kobasice“ od 600 ml i kartuše od 300 ml
.....
“Tubes” of 600 ml and 300 ml cartridges

Boje / Colours

Bijela i siva
.....
White and grey

AKWAFLEX MARINE

Kit za brtvljenja i lijepljenja na brodovima
Kit for sealing and adhesion on ships

Primjena / Application

- Brtvljenje i lijepljenje na brodovima
- Brtvljenje spojeva u građevinarstvu (vrata, prozori, krovovi, prefabricirani elementi, spremnici vode, spojevi na podovima...)
- Brtvljenje klimatizacijskih uređaja i ventilacije
- Brtvi beton, drvo, mramor, aluminij, čelik, keramiku, gipsane ploče itd.
- Općenito kao industrijsko ljepilo
-
- *Sealant and adhesive on for ships*
- *Sealing joints in construction (doors, windows, roofs, prefabricated elements, water containers, floor joints...)*
- *Sealing air conditioners and ventilation*
- *Seals concrete, wood, marble, aluminium, steel, ceramics, gypsum plates, etc.*
- *As a general-purpose industrial adhesive*

Prednosti / Advantages

- Jednostavan i ekonomičan za upotrebu
- Jednokomponentan
- Izvrsna otpornost na starenje
- Ostaje elastičan i do -40°C
- Dobra otpornost na mikroorganizme i razne kemikalije
- Dobra prionjivost na gotovo svaku podlogu
-
- *Simple and cost-effective for use*
- *Single-component*
- *Excellent resistance to aging*
- *Elastic at up to -40°C*
- *Good resistance to micro-organisms and various chemicals*
- *Good adhesiveness to nearly any surface*

Potrošnja / Consumption

Ovisno o širini i dubini reške

.....
Depends on the width and depth of the joint



Pakiranje / Packaging

„Kobasice“ od 600 ml i kartuše od 300 ml

.....
“Tubes” of 600 ml and 300 ml cartridges

Boje / Colours

Bijela, siva i crna

.....
White, grey, and black

AKWABAND ARM 12.0

Brtveća hidroizolacijska traka za ojačanje hidroizolacijskih premaza
Sealing waterproofing strip for waterproofing coating reinforcement

Primjena / Application

- Brtvljenje dilatacija, spojeva i pukotina u visokogradnji
- Ojačanje hidroizolacijskih premaza na dilatacijama, pukotinama, denivelacijama podloge i spojevima površina (npr. Spoj estriha sa zidom)
- *Sealing of expansions, joints, and fissures in high-rise construction*
- *Reinforcement of waterproofing coatings on expansions, fissures, de-levelling of the base surface and surface joints (for instance, the connection between the screed and the wall)*

Prednosti / Advantages

- Jednostavna ugradnja
- Izražena rastezljivost i vlačna čvrstoća
- Kompatibilna sa svim građevinskim materijalima
- *Simple installation*
- *Pronounced extensibility and tensile strength*
- *Compatible with all construction materials*

Pakiranje / Packaging

Rola dužine 50 m i širine 12 cm
50 m length and 12 cm width roll



AKWABAND ARM PVC 12.0

Brtveća hidroizolacijska traka s termoplastičnim PVC-om za ojačanje hidroizolacijskih premaza
Sealing waterproofing strip with thermoplastic PVC for reinforcing waterproofing coatings

Primjena / Application


- brtvljenje dilatacija, spojeva i pukotina u visokogradnji.
- Ojačanje hidroizolacijskih premaza na dilatacijama, pukotinama, denivelacijama podloge i spojevima površina (npr. spoj estriha sa zidom)
- *Sealing of expansions, joints, and fissures in high-rise construction*
- *Reinforcement of waterproofing coatings on expansions, fissures, de-levelling of the base surface and surface joints (for instance, the connection between the screed and the wall)*

Prednosti / Advantages

- Jednostavna ugradnja
- Izražena rastezljivost i vlačna čvrstoća
- Kompatibilna sa svim građevinskim materijalima
- *Simple installation*
- *Pronounced extensibility and tensile strength*
- *Compatible with all construction materials*

Pakiranje / Packaging

Rola dužine 50 m i širine 12 cm
50 m length and 12 cm width roll

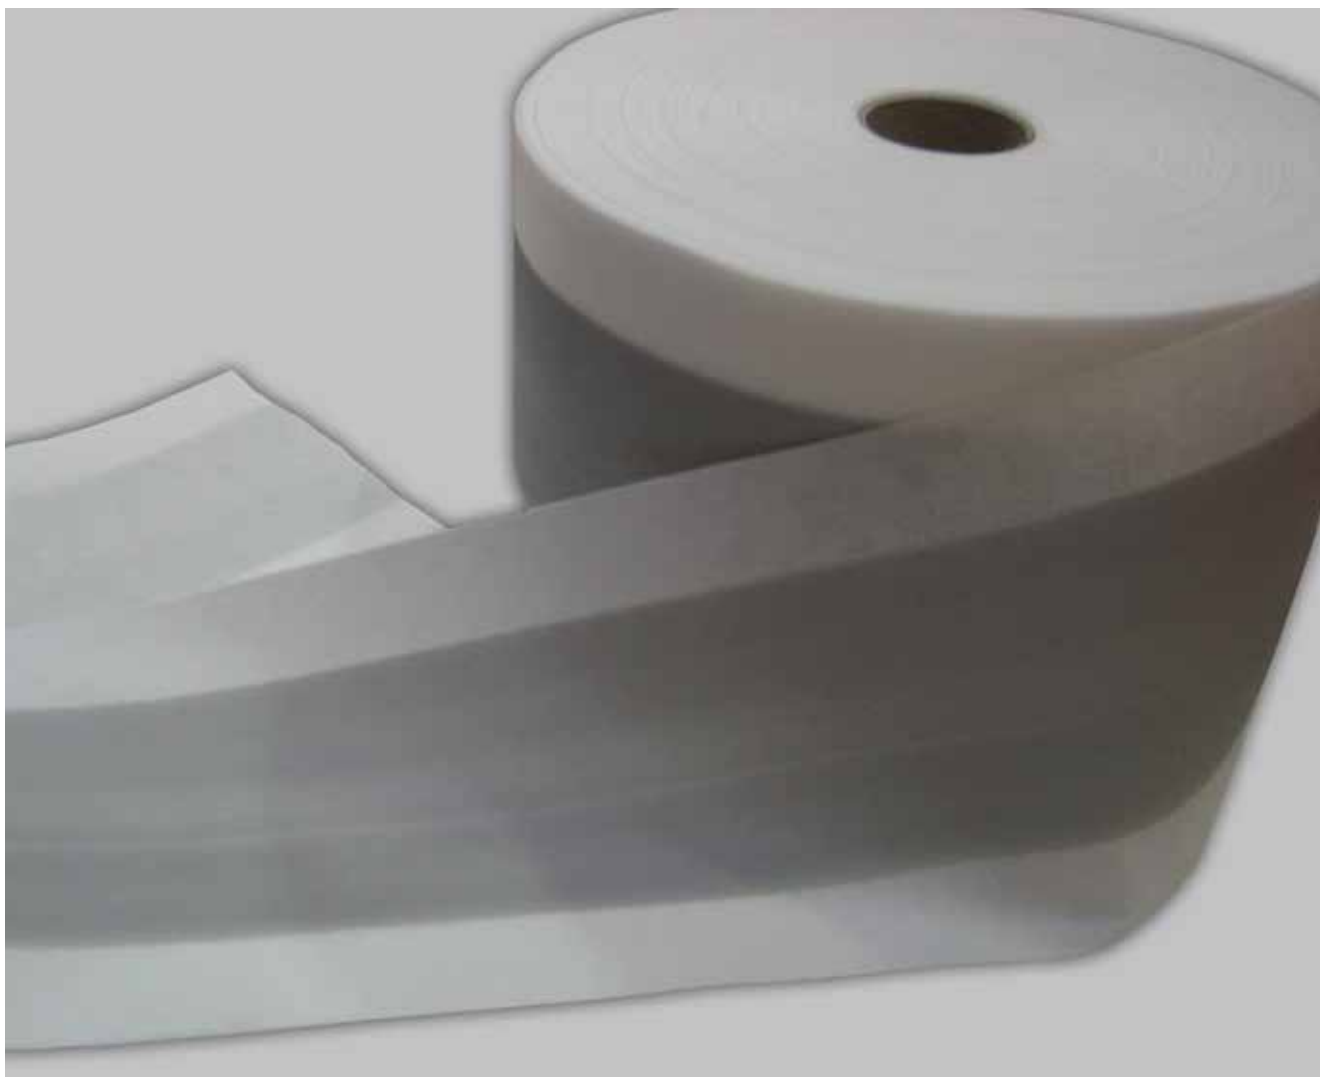

AKWABAND BUTYL 5.0 i 10.0

Samoljepiva brtveća hidroizolacijska traka za ojačanje hidroizolacijskih premaza
Adhesive sealing waterproofing strip for reinforcing waterproofing coatings

Primjena / Application

- Brtvljenje spojeva i pukotina u interijerima
- Ojačanje hidroizolacijskih premaza na pukotinama, denivelacijama podloge i spojevima površina
-
- *Sealing of joints and fissures in interiors;*
- *Reinforcement of waterproofing coatings on fissures, de-leveling of the base surface and surface joints*

Pakiranje / Packaging

Rola dužine 25 m i širine 5 cm ili 10 cm
.....
25 m length and 5 cm or 10 cm width roll

Prednosti / Advantages

- Samoljepiva traka
- Lijepi se na sve podloge
- Izražena rastezljivost
- Poliesterska mrežica osigurava odličnu vezu s ljepilima za pločice, hidroizolacijskim premazima i brtvilima
-
- *Adhesive strip*
- *Adhesion to all surfaces*
- *Pronounced extensibility*
- *Polyester net provides for excellent connection to tile adhesives, waterproofing coatings and sealants*



AKWATEK ALU 5.0 i 10.0

Samoljepljiva brtveća traka za brtvljenje prozorskih okvira i svjetlarnika, slivnika, limenih krovova...
Adhesive sealing strip for sealing window frames and small windows, gullies, tin roofs...

Primjena / Application

- Zaštita bitumena, opeke, betona, metalnih i plastičnih materijala na krovovima i pokriva općenito
- Brtvljenje nadozida, staklenih i plastičnih prozorskih okvira i svjetlarnika
- Popravci šindre, slivnika, metalnih cijevi, limenih krovova itd.
-
- *Protection of bitumen, brick, concrete, steel, and plastic materials on roofs and covers in general*
- *Sealing for knee walls, glass and plastic window frames and small windows;*
- *Repairs of shingles, gullies, metal pipes, tin roofs, etc.*

Prednosti / Advantages

- Brza i jednostavna aplikacija
- Prianja na većinu građevinskih materijala uključujući bitumen, opeku, cement, mramor, keramiku itd.
- Lijepi se za površinu eliminirajući probleme podizanja zbog vjetra ili vjetrom tjerane vode
-
- *Quick and simple application;*
- *Adheres to most construction materials including bitumen, brick, cement, marble, ceramics, etc.*
- *Adheres to the surface, eliminating elevation problems due to wind or wind-driven water*

Pakiranje / Packaging

rola dužine 10 m i širine 5 cm ili 10 cm

.....
10 m length and 5 cm or 10 cm width roll



AKWABAND BLU 100.0

Traka za punoplošno ojačanje polimercementnih hidroizolacijskih premaza
Strip for full-surface reinforcement of polymer cement waterproofing coatings

Primjena / Application

- Punoplošno ojačanje polimercementnih hidroizolacijskih premaza
.....
- *Full-surface reinforcement of polymer cement waterproofing coatings*

Prednosti / Advantages

- Jednostavna ugradnja
- Izražena rastezljivost i žilavost
- Kompatibilna sa svim građevinskim materijalima
.....
- *Simple installation*
- *Pronounced extensibility and tenacity*
- *Compatible with all construction materials*

Pakiranje / Packaging

Rola duljine 30 m i širine 100 cm
.....
Roll 30 m in length and 100 cm in width



AKWABAND JOINT 24.0

Traka za brtvljenje i ojačanje hidroizolacijskih premaza na konstruktivnim dilatacijama
Strip for sealing and reinforcement of waterproofing coatings on structure expansions

Primjena / Application

- Brtvljenje konstruktivnih dilatacija
- Ojačanje hidroizolacijskih premaza na dilatacijama i širokim pukotinama
-
- *Sealing of construction expansions*
- *Reinforcement of waterproofing coatings on expansions and wide fissures*

Prednosti / Advantages

- Jednostavna ugradnja
- Izražena rastezljivost i povećana vlačna čvrstoća
- Kompatibilna sa svim građevinskim materijalima
-
- *Simple installation*
- *Pronounced extensibility and increased tensile strength*
- *Compatible with all construction materials*

Pakiranje / Packaging

Rola duljine 30 m i širine 24 cm
.....
Roll 30 m in length and 24 cm in width



AKWABAND NET 100.0

Mreža za punoplošno ojačanje hidroizolacijskih premaza
Net for full-surface reinforcement of waterproofing coatings

Primjena / Application

- Punoplošno ojačanje hidroizolacijskih premaza
.....
- *Full-surface reinforcement of waterproofing coatings*

Prednosti / Advantages

- *Jednostavna ugradnja*
- *Izražena rastezljivost i vlačna čvrstoća*
- *Kompatibilna sa svim građevinskim materijalima*
.....
- *Simple installation*
- *Pronounced extensibility and tensile strength*
- *Compatible with all construction materials*

Pakiranje / Packaging

Rola dužine 50 m i širine 100 cm
.....
50 m length and 100 cm width roll



RADUJEMO SE NOVIM IZAZOVIMA

WE LOOK FORWARD TO NEW CHALLENGES



Za detaljnije informacije obratite se našoj prodajnoj službi:

For more detailed information, please contact our sales department:

SPLIT - ZAGREB - RIJEKA - BEOGRAD - SARAJEVO

info@dracopro.com

Fotografije ne moraju biti 100% identične proizvodima. Zadržavamo pravo tiskarske greške.

PRIJE UPOTREBE PROIZVODA OBVEZNO PROČITATI TEHNIČKI LIST.

Photos may not appear 100% identical to the actual products. We reserve the right for eventual printing errors and the possibility that a product may be out of stock.

THE USER MUST READ THE TECHNICAL SHEET BEFORE PRODUCT USE.

